


LIGHTING FIRST

BRIODLIGHTS

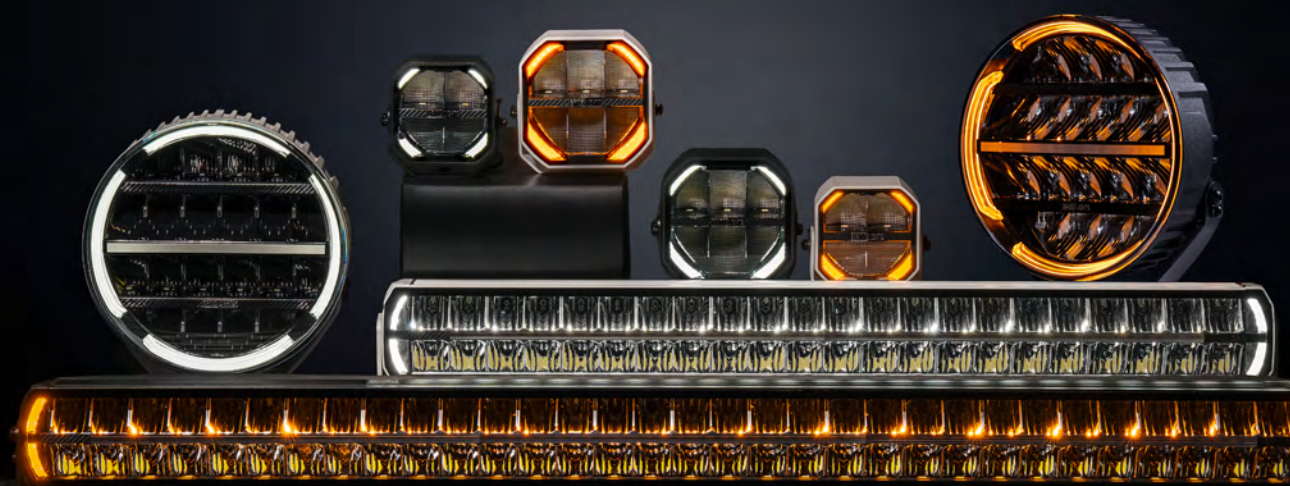

ABOUT US

As Abkati's own brand, BriodLights goal is to provide customers with good, durable and steady lighting solutions for your vehicle, whether you need additional lights, warning lights, position lights, work lights, or any other type of lighting. Rooted in Abkati's heritage of experience and expertise in the vehicle industry since 1929, BriodLights are dedicated to deliver products with the highest level of performance at a fair price.

In the development of all BriodLights products, optics are always at the center. Our lamps are engineered to evenly distribute light across the road or workspace, eliminating unwanted glare and ensuring no light is wasted. Combined with carefully balanced color temperatures tailored to each application, our lighting ensures clear contours and visibility in all conditions.

The right skills at the same place

At BriodLights, our vision is to be the leading provider of high-quality, affordable vehicle lighting solutions. We are committed to offering a wide range of products that cater to the needs of our diverse customer base, which includes dealers, workshops, body builders, and individuals who operate trucks, construction machinery, agricultural machinery, service vehicles and passenger cars.

Of course, we want to be where our customers are, and that's why we have a fantastic dealer network that helps us with sales. To expand our reach, we are actively seeking passionate and knowledgeable dealers to join our network. If you share our commitment to quality and want to represent innovative vehicle lighting solutions, we'd love to hear from you. Together, we can bring high-quality lighting and exceptional service to more customers across Europe.

Abkati - on the road since 1929

Since its inception in 1929, Abkati has been a prominent player in the automotive industry, known for our commitment, quality and excellent customer service. From the moment the company entered the Swedish market with its first product line of fittings and rubber parts, Abkati has been on the move.

Abkati's vision goes far beyond just being a supplier of high-quality products. We aim to be pioneers in our industry. By constantly exploring new technologies and solutions and actively listening to our customers' feedback, we are shaping the future of our industry and contributing to our customers' success.



Visit us on
briodlights.com



WHY BRIOD?

EXPERIENCE SINCE 1929

BriodLights is part of Abkati — a company with more than 90 years of experience in the vehicle industry. Our heritage is built on knowledge and a passion for quality that drives everything we do today.

COMPLETE RANGE

Beyond lighting, we deliver everything you need for your vehicle. With Briod Tech, Hardware and Accessories, we offer a complete range that makes it easy to build, equip and upgrade your setup.

MAXIMUM LIGHT VALUE

With BriodLights, you always get more light for your money. Every product is designed to deliver exceptional performance, reliability and efficiency — giving you maximum light value on every drive.

WE GOT YOUR BACK

Our products are built to last, and we stand behind their ability to perform reliably and meet the highest quality standards. That's why we offer a three-year functional guarantee on all lighting solutions in our range.



@briodlights

BRIOD LIGHTS

INTRODUCING THE OLYMPUS SERIES

Following the successful launch of the Olympus 9", BriodLights is taking the next step. What started as a powerful driving light is now evolving into a complete product family with the introduction of new LED light bars, work lights, and an updated version of the popular Olympus 9". The new products are built on the same philosophy that has made Olympus highly appreciated on the market: high performance, thoughtful design, and maximum lighting performance for every euro invested.


Every product in the Olympus range carries the same signature design. Powerful output, optimized light distribution and uncompromising functionality come together in a series engineered for professionals who depend on visibility every day. Whether you're driving through dark roads, working long hours in demanding environments or navigating unpredictable weather conditions, Olympus is built to perform when it matters most.

The updated Olympus driving light continues to push boundaries with exceptional reach, wide beam performance and integrated features. The new Olympus 3.0 comes with an integrated backlit function that illuminates the lens itself, creating a distinctive look while maintaining the design Olympus is known for. The driving light still features integrated warning light and dual-color position light in both white and amber, delivering maximum versatility for both everyday driving and demanding professional environments.

Alongside a new driving light, we introduce new LED light bars and work lights engineered to carry the same powerful lighting into even more applications and vehicle types. The Olympus work lights are available in two sizes and feature integrated position light in white/amber and red/amber, combining functionality and visibility in one complete solution. The new Olympus LED light bars are introduced in 30" and 40" versions and include dual-color position light together with integrated warning light functionality.

Together, they offer a complete lighting solution.

More light, more Olympus.

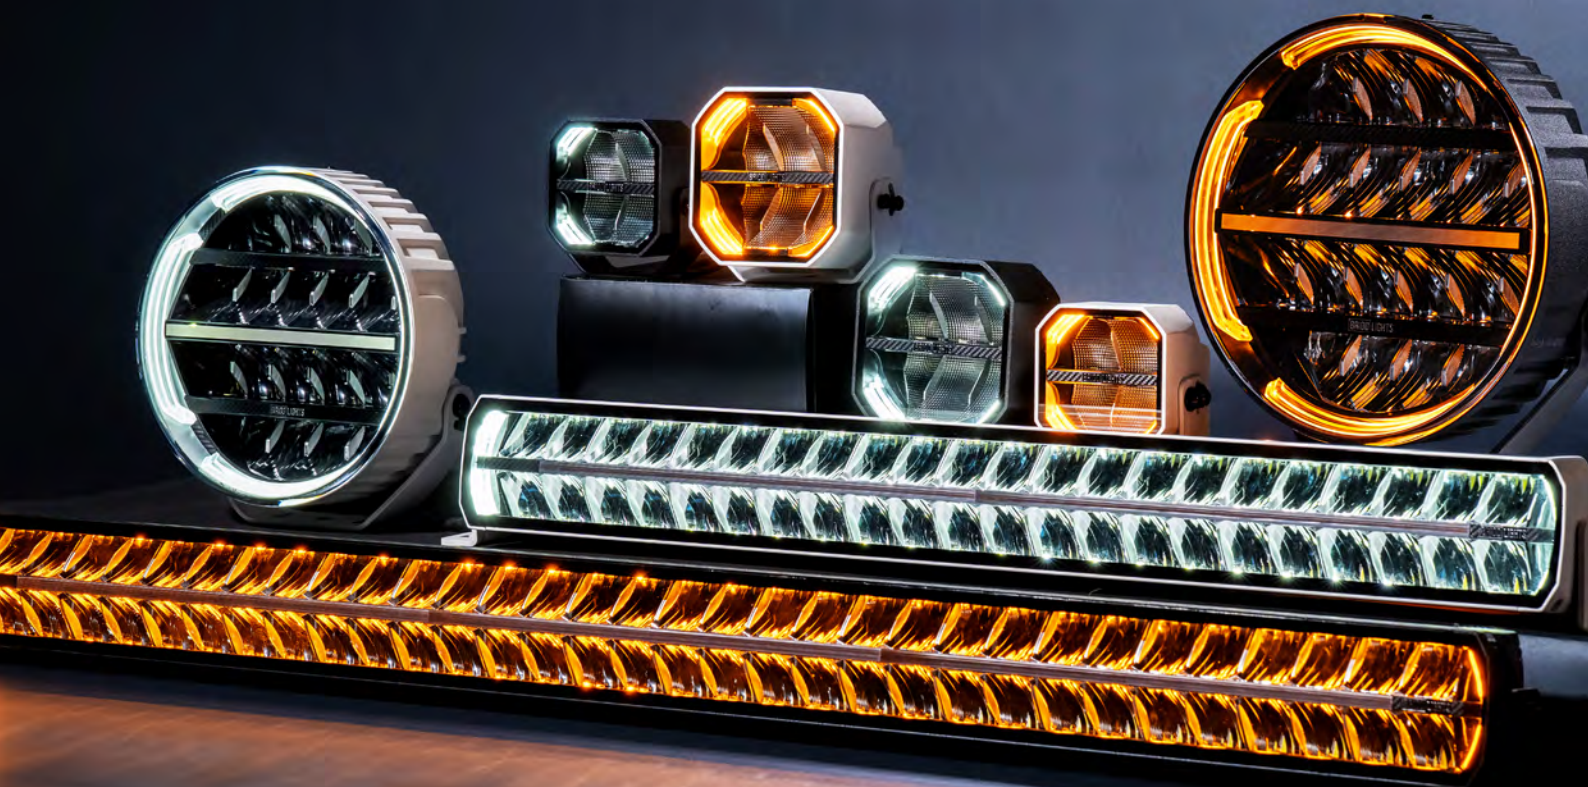

DRIVING LIGHTS





Scan the qr-code to
discover all driving lights



OLYMPUS 3.0

NEW!

**INTEGRATED BACKLIT
POSITION LIGHT**



Article. 15873 (Black) / 15874 (White)

BriodLights now introduces an updated version of the best-selling Olympus 9". The new model retains the same distinctive design and impressive lighting performance that made the lamp so popular, while adding several highly requested features. The Olympus 3.0 driving light is equipped with an integrated backlit position light, traditional position light, and warning strobe function, making it even more versatile for professional users.


With a powerful beam reaching up to 844 meters at 1 lux and an impressive 12,400 lumens in boost mode, Olympus 3.0 offers exceptional visibility both in range and width. Optical enhancements ensure wide-angle coverage, giving you outstanding lighting value in every direction. Built for durability, the lamp housing is powder-coated by AkzoNobel – one of the world's leading manufacturers of industrial coatings – ensuring it stands up to tough conditions. Simply put, it's a complete lamp suitable for everyday use. ECE R148, R149. EMC R10, R65, R112. 3 year function warranty!



E-APPROVED


Article. 15873 (Black), 15784 (White)

Bulb type	LED
Diodes	20 pcs
Theoretical Lumens	18 000 lm
Effective Lumens	2488 lm (R112), 12 400 lm (boost)
Voltage	12-30 V DC
Watt	170 W
Nominal Current at 12 V	14 A
Nominal Current at 24 V	7,5 A
Colour Temperature	5600 K
1 lux at	844 m
Diameter	228 mm
Weight	2,8 kg
Connector	Cable 2.5 m
IP-rating	IP68
Housing	Aluminium
Lens	PC
Operating Temp.	-40°C to +60°C
Light Pattern	Driving Beam

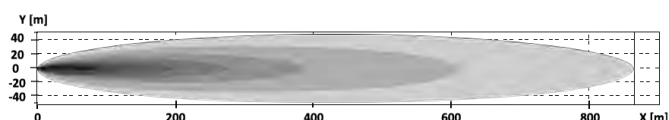

Add the transparent lens cover designed for Olympus Driving Light.

Article. 15872

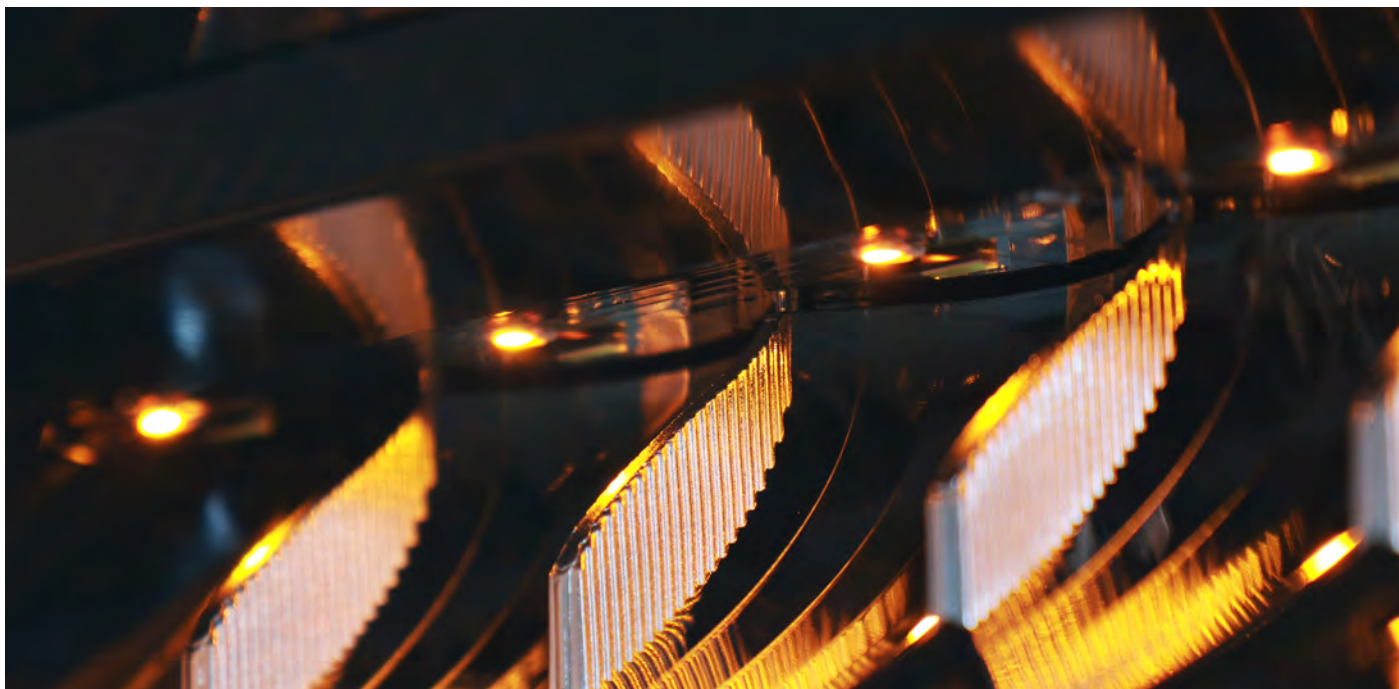

OLYMPUS 2.0



Article. 15870 (Black) / 15871 (White)


Olympus version 2.0 features a modernized position light design that adds a sleek, three-dimensional feel to your vehicle. With a powerful beam reaching up to 844 meters at 1 lux and an impressive 12,400 lumens in boost mode, Olympus 2.0 offers exceptional visibility both in range and width. Optical enhancements ensure wide-angle coverage, giving you outstanding lighting value in every direction. Integrated features like position light and warning light make Olympus 2.0 a complete solution for both daily driving and demanding environments. Built for durability, the lamp housing is powder-coated by AkzoNobel – one of the world's leading manufacturers of industrial coatings – ensuring it stands up to tough conditions. Simply put, it's a complete lamp suitable for everyday use. ECE R148, R149. EMC R10, R65, R112. 3 year function warranty!



E-APPROVED

Article. 15870 (Black), 15781 (White)

Bulb type	LED
Diodes	20 pcs
Theoretical Lumens	18 000 lm
Effective Lumens	2488 lm (R112), 12 400 lm (boost)
Voltage	12-30 V DC
Watt	170 W
Nominal Current at 12 V	14 A
Nominal Current at 24 V	7,5 A
Colour Temperature	5600 K
1 lux at	844 m
Diameter	228 mm
Weight	2,8 kg
Connector	Cable 2.5 m
IP-rating	IP68
Housing	Aluminium
Lens	PC
Operating Temp.	-40°C to +60°C
Light Pattern	Driving Beam



Add the transparent lens cover designed for Olympus 2.0 Driving Light.

Article. 15872



TAPANI TRUCKING CHOOSES BRIODLIGHTS

For more than three years, Anton and Emil Tapani have been dedicated BriodLights ambassadors – two brothers whose passion for heavy transport and iconic truck builds has made them standouts in the Nordic trucking scene. Operating Tapanis Entreprenad AB, a family business now in its fourth generation, the brothers move through the tough environments in northern Scandinavia with trucks as bold as their heritage. And on every build, BriodLights plays a central role.

Tapanis Entreprenad has been built on commitment and reliability for generations. Those same values are at the core of BriodLights. The collaboration came together naturally, driven by shared values and a demand for reliable lighting in everyday work.

"We chose to start working with BriodLights more than three years ago. Since then, a lot has happened – both within our company and at Briod. It's been so fun and rewarding to be part of a long-term partnership where we grow and develop side by side. Today, BriodLights is an obvious and trusted part of Tapani Trucking."

Across their fleet, BriodLights lighting solutions support demanding heavy transport, long night drives and the harsh climate of the far north – ensuring the best visibility wherever the job takes them.



”

We continue to choose BriodLights because their lighting does what it's supposed to do. It's built for real work, delivers consistent performance and gives us the visibility and safety we rely on every day. When lighting is a necessity, the choice is easy.

EDGE DRIVING LIGHT 9"



Article. 15857

As part of the popular Edge series, BriodLights introduces a round driving light with powerful brightness, delivering 6900 effective lumens and reaching 1 lux at 644 m. The Edge 9" driving light follows the same advanced optics as the Edge LED light bars, with light distributed evenly on and along the roadway without spill light. The driving light has dynamic position light in white and amber and is perfect for lighter vehicles such as passenger cars and light trucks. 3 year function warranty!




E-APPROVED

Add the transparent lens cover designed for Edge Driving Light.


Article. 15858

Article. 15857

Bulb type	LED
Diodes	14 pcs
Theoretical Lumens	11 900 lm
Effective Lumens	6900 lm
Voltage	9-33 V
Watt	120W @ 12V, 97W @ 24V
Nominal Current at 12 V	10 A
Nominal Current at 24 V	4 A
Colour Temperature	5700 K
1 lux at	644 m
Diameter	212x211x80 mm
Weight	2,3 kg
Connector	6-pin DT
IP-rating	IP68/69K
Housing	Die-cast Aluminium
Lens	PC
Operating Temp.	-40°C to +60°C
Light Pattern	Wide Driving





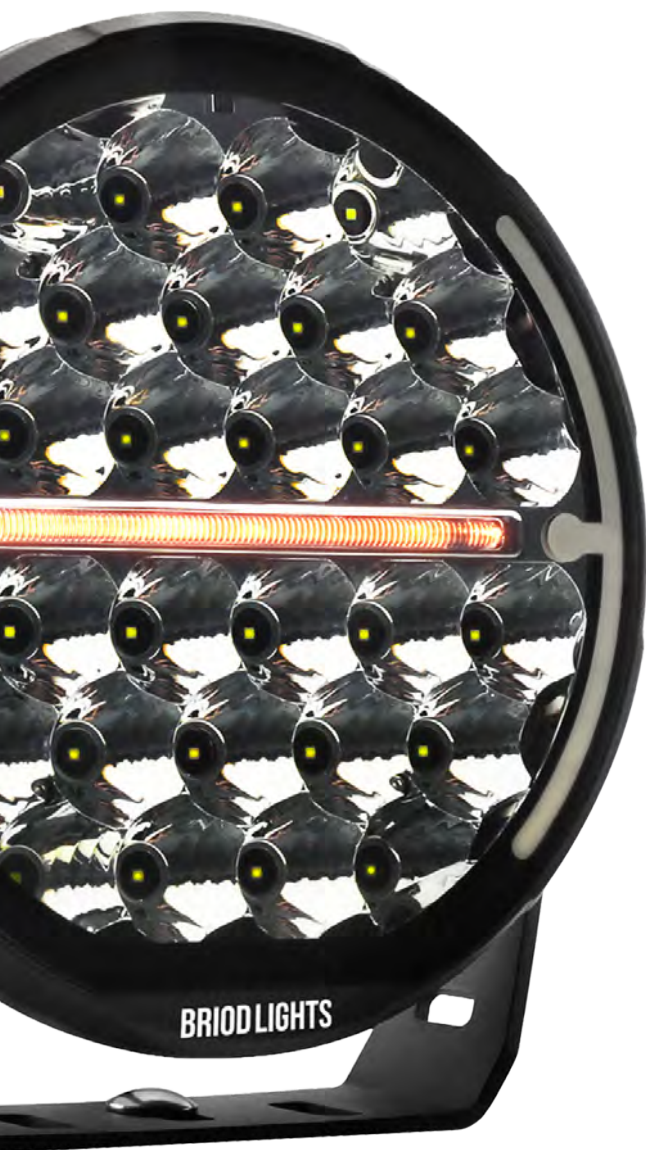

Article. 15225

ICE-X DRIVING LIGHT 9"


BriodLights ICE-X 216 mm LED driving light is developed to meet the highest demands on performance and design. The Driving light is specially developed for the harsh Nordic climate with an integrated heating function with de-icing effect. ICE-X 216 mm LED Driving light measures 1 lux at 454 meters and provides 13500 lumens. In addition, the Driving Beam light pattern generates a wide and strong light that is perfect for varied driving. The Driving light has an integrated position light with the option to choose between white and amber. E-approved. 3 year function warranty!



E-APPROVED

Article. 15225

Bulb Type	LED
Diodes	30x5 pcs
Theoretical Lumens	13 500 lm
Effective Lumens	10 500 lm
Voltage	9-36 V
Watt	150 W
Nominal Current at 12 V	8,8 A
Nominal Current at 24 V	4,2 A
Colour Temperature	6000 K
1 lux at	454 m
Diameter	216 mm
Connector	DT
Housing	Aluminium
Lens	PC
Light pattern	Driving Beam

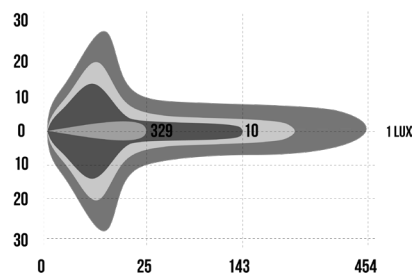





Article. 15810

ULTRA LED DRIVING LIGHT 9"


BriodLights Ultra LED driving light brings a whole new level to night time driving. Ultra 220 mm features a powerful light output: 1 lux at 960 m and 11600 effective lumens. With 5000 K the light emits a soft light accentuating contours especially in snowy conditions. Easy to install thanks to stable brackets in stainless steel. 3 year function warranty!

Add the transparent lens cover suitable for Ultra 9".

Article. 15811

Bulb Type	LED
Diodes	37x5W Osram
Theoretical Lumens	16 600 lm
Effective Lumens	11 600 lm
Voltage	9-32 V
Watt at 12 V	150 W
Watt at 24 V	140 W
Nominal Current at 12 V	11.25 A
Nominal Current at 24 V	5.62 A
Colour Temperature	5000 K
1 lux at	960 m
Diameter	220 mm
Weight	3,1 kg
Connector	DT
IP-rating	IP68
Housing	Aluminium
Lens	PMMA
Operating Temp.	-40°C to +115°C
Light Pattern	Combo

Article. 15810

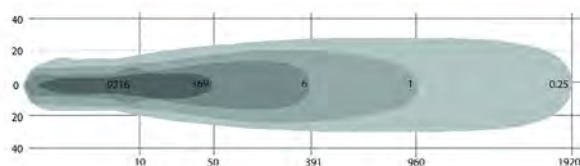


Article. 15252

COMBO X DRIVING LIGHT

BriodLights Combo X is a powerful driving light that combines high-performance high beams with an integrated warning light - perfect for commercial vehicles and demanding environments. With up to 11,000 lumens in boost mode and a rugged black aluminum construction, it delivers both long range and high reliability. The dark glass gives it a sleek look, while the choice of white or yellow position lights allows the light to suit different needs and vehicle types. Ref. 50 (lux). R10, R148, R149, R65. 3 year function warranty!



Article. 15252	
Bulb Type	LED
Diodes	12 pcs
Theoretical Lumens	11 000 lm
Effective Lumens	8500 lm
Voltage	9-36 V
Flash patterns	3 pcs
Nominal Current at 12 V	11.6 A
Nominal Current at 24 V	5.83 A
Colour Temperature	5000 K
1 lux at	556 m
WxHxD	247x141x83 mm
Connector	DT 6-pin
IP-rating	69K
Housing	Aluminium
Lens	PC
Operating Temp.	-40°C to +60°C
Light Pattern	Combo

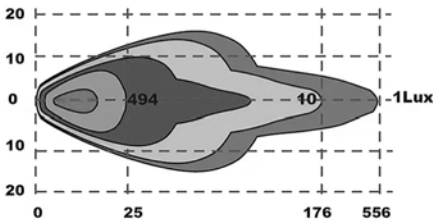



Article. 15224 / 15209


STATUM LED DRIVING LIGHT 7"/9"

Statum LED driving light is for the design junkie who refuses to compromise on performance. The combo light pattern provides a wide and long light output that is suitable for most driving. Statum LED driving light also has integrated position light in white and amber. The housing is made of durable aluminum and the lens is made of protective polycarbonate. Choose between 7" or 9". 3 year function warranty!




E-APPROVED

	Article. 15224 (7")	Article. 15209 (9")
Bulb Type	LED	LED
Diodes	8 pcs	8 pcs
Theoretical Lumens	6000 lm	12 000 lm
Effective Lumens	4800 lm	10 200 lm
Voltage	9-36 V	9-36 V
Watt	60 W	120 W
Nominal Current at 12 V	4 A	8,9 A
Nominal Current at 24 V	2 A	4,3 A
Colour Temperature	5700 K	5700 K
1 lux at	406 m	469 m
LxHxD	180x192x68 mm	218x232x84 mm
Weight	1,15 kg	2 kg
Connector	DT	DT
Housing	Aluminium	Aluminium
Lens	PC	PC
Operating Temp.	-30°C to +40°C	-30°C to +40°C
Light Pattern	Combo	Combo



Article. 15224



Article. 15209



Article. 15202

LED DRIVING LIGHT

Introducing BriodLights LED Driving Light 9" with an integrated position light, the perfect choice for the discerning design enthusiast who demands exceptional performance. The advanced driving beam pattern provides an extensive and far-reaching light output, making it an ideal fit for a wide range of driving scenarios. Crafted with precision, the housing is made of rugged aluminum, while the lens is fashioned from protective polycarbonate, ensuring both durability and longevity. 3 year function warranty!



Article. 15222

JUMBO LED DRIVING LIGHT


If you're looking for an LED driving light that offers unmatched performance and stunning design, look no further than BriodLights Jumbo LED Driving Light. Featuring an integrated position light and an advanced driving beam pattern, this powerful light is perfect for a wide range of driving scenarios. Expertly crafted from durable aluminum and protected by a polycarbonate lens, the Jumbo LED Driving Light is built to last and withstand the toughest conditions. Weight: 1.94 kg. 3 year function warranty!



E-APPROVED


Article. 15202

Light pattern	Driving Beam
Effective Lumens	10800 lm
WxHxD	218x218x68,5 mm
Theoretical Lumens	12 000 lm
Diodes	12 pcs
ECE	R10, R65
Colour Temperature	6000 K
Bulb Type	LED
1 Lux at	425 m
IP	69K
Voltage	9-36 V
Lens	PC



Article. 15222

Light pattern	Driving Beam
Effective Lumens	8500 lm
WxHxD	247x176x92 mm
Theoretical Lumens	10 000 lm
Diodes	6 pcs
ECE	R10, R65
Colour Temperature	6000 K
Bulb Type	LED
1 Lux at	420 m
IP	69K
Voltage	9-36 V
Lens	PC

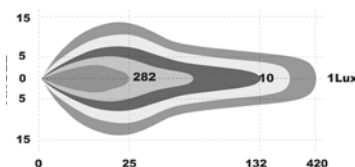

THE COMMUNITY BEHIND BRIODLIGHTS

A big part of BriodLights is our ambassadors - people who use our products every day and know what good lighting really means. We're proud to have ambassadors like Tapani Trucking, Simon Lundman, Philip Lindmark and Alexander Laanen (to name a few!) as part of the BriodLights family. Over the years, we've also expanded our ambassador network outside Sweden and today we work with ambassadors in Italy, Spain, France, Germany and Iceland.

Together, we share the same passion for high-quality lighting and continue spreading BriodLights across Europe.





LED LIGHT BARS





BRIOD LIGHTS


Scan the qr-code to
discover all LED
light bars



OLYMPUS

LED LIGHT BAR

NEW!

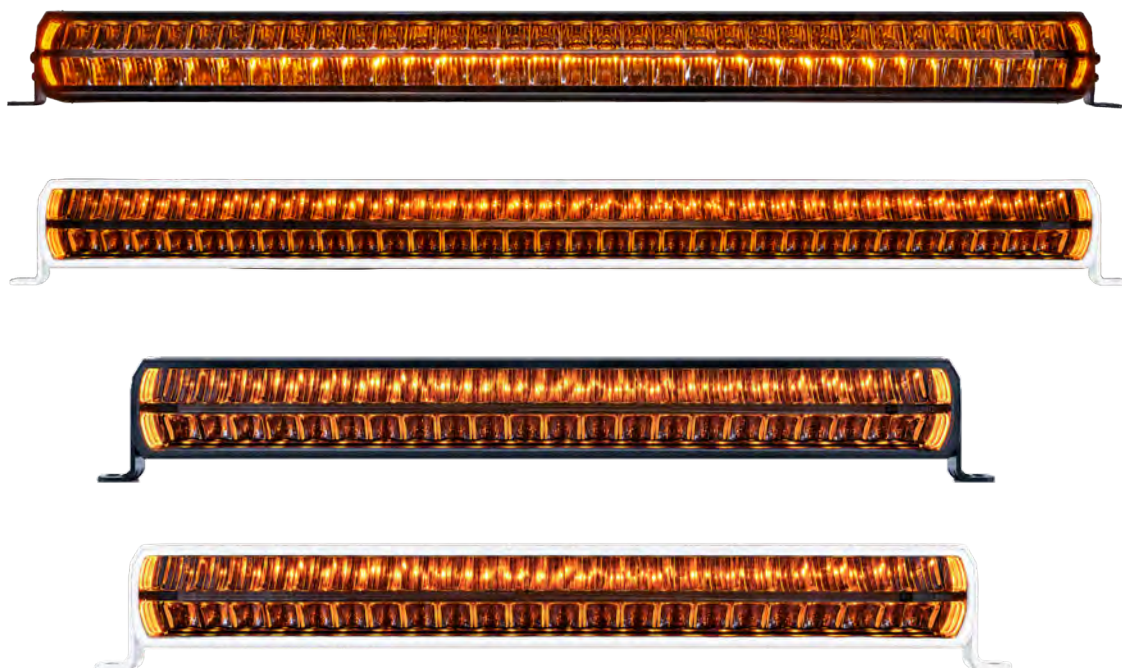


	Article. 15879	Article. 15880	Article. 15881	Article. 15882
Length	30" (768 mm)	30" (768 mm)	40" (1092 mm)	40" (1092 mm)
Bulb Type	LED	LED	LED	LED
Color	Black	White	Black	White
Diodes	44 x 15 W	44 x 15 W	64 x 15 W	64 x 15 W
Theoretical Lumens	25 000 lm	25 000 lm	37 000 lm	37 000 lm
Actual Lumens	20 600 lm	20 600 lm	29 900 lm	29 900 lm
Voltage	9-32V DC	9-32V DC	9-32V DC	9-32V DC
Watt	280 W	280 W	400 W	400 W
Nominal Current at 12V	25 A	25 A	32 A	32 A
Nominal Current at 24V	11.7 A	11.7 A	16.7 A	16.7 A
Colour Temperature	5500K	5500K	5500K	5500K
Weight	4.1 kg	4.1 kg	6.2 kg	6.2 kg
1 lux at	970 m	970 m	1170 m	1170 m
LxHxD	768x93.6x84 mm	768x93.6x84 mm	1092x93.6x84 mm	1092x93.6x84 mm
Connector	Cable 0.5 m	Cable 0.5 m	Cable 0.5 m	Cable 0.5 m
Position Light	White/Amber	White/Amber	White/Amber	White/Amber
IP-rating	IP68K	IP68K	IP68K	IP68K
Operating Temp.	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C
Housing	Die-cast Aluminium	Die-cast Aluminium	Die-cast Aluminium	Die-cast Aluminium
Lens	IP68K	IP68K	IP68K	IP68K
ECE	R149, R148, R65, R10	R149, R148, R65, R10	R149, R148, R65, R10	R149, R148, R65, R10
EMC	R10	R10	R10	R10
Light Pattern	Driving Beam	Driving Beam	Driving Beam	Driving Beam

The BriodLights Olympus series now expands with two powerful LED light bars that combine outstanding light performance and advanced functionality with a robust design for professional use. Featuring an integrated backlit position light, traditional position light in white or amber, and a built-in warning light, the new light bars offer a complete solution where visibility, safety, and design come together in a single product. The 30" model delivers 20,600 effective lumens and reaches an impressive 970 meters at 1 lux. It gives a 56 m wide beam pattern at 50 m. For those demanding maximum range, the larger 40" version produces 29,900 effective lumens and reaches up to 1,170 meters at 1 lux. This model delivers a 60 m wide beam pattern at 50 m. Both models feature an optimized Driving Beam pattern and a 5,500 K color temperature, providing a clear, comfortable light output with excellent contrast and visibility.

Built to withstand demanding environments, the light bars feature a durable powder-coated aluminium housing, IP68 protection, and components engineered for long service life. Available in both black and white finishes, they are E-approved according to R149, R148, and R65 standards, making them an ideal choice for professional vehicles where performance, reliability, and functionality are essential. 3 year function warranty!




E-APPROVED



1 lux at 970 m

BriodLights Olympus LED Light bar 30" Black
Article. 15879

BriodLights Olympus LED Light bar 30" White
Article. 15880



1 lux at 1170 m

BriodLights Olympus LED Light bar 40" Black
Article. 15881

BriodLights Olympus LED Light bar 40" White
Article. 15882



EDGE LED LIGHT BAR - A SMARTER CHOICE

With the Edge series' angled front, the LED bar follows the vehicle's original aerodynamics to minimize air resistance. Minimal air resistance combined with minimal weight keeps fuel consumption low, which is not only an advantage for your wallet but also for the environment. As a bonus, the angled front also ensures that snow and dirt do not stick to the glass but is easily blown away by the wind.

Henrik Fransson, technical expert at BriodLights, explains that the Edge bars also have other environmental benefits.

"Our customers are becoming increasingly environmentally conscious and have higher expectations for us as a producer and supplier to act in a climate-smart way. We have been meticulous about quality and ensuring that Edge has a long lifespan, which we believe we have succeeded in."

Furthermore, Henrik explains that all unnecessary plastic has been removed from the packaging, and they have also made a decision to climate invest by planting a tree for every Edge bar sold through the organization Plantmore. He emphasizes that this is only a complement to the company's environmental work, which they constantly review and strive to improve.

"In the long run, we want our products to be produced, packaged, and transported in the most sustainable way possible, but it is a big machinery that takes time. Right now, we are looking at the possibilities of using only recycled material in BriodLights packaging and finding an alternative to plastic as inner packaging in the boxes."



NEW!




Article. 275-63004

EDGE LED LIGHT BAR 44"

Edge 44" is the newest addition to the popular Edge light bar series. With an updated length of 1124 mm, this LED bar is an excellent choice for trucks and larger vehicles. Just like the other models in the Edge series, the light bar features a sloped front and an aerodynamic design optimized to reduce wind resistance while repelling dirt and snow. It also gives a discreet impression through its minimal dimensions and dark appearance. Edge 44" does not include a white position light, making it ideal for users who prefer a cleaner installation, simpler wiring or a more subtle appearance. The Driving Beam light pattern provides a wide and powerful light which is perfect for all driving styles. The light bar measures 14 500 actual lumens and reaches 1 lux at 360 meters. Supplied with PC brackets (1 side bracket set and 2 bottom brackets) for flexible mounting options. 3 year function warranty!

Article. 275-63004	
Length	44" (1124 mm)
Bulb Type	LED
Theoretical Lumens	20 100 lm
Actual Lumens	14 500 lm
Voltage	9-33 V
Power at 12 V	216.5 W
Power at 24 V	198.8 W
Colour Temperature	5000 K
1 lux at	360 m
WxHxD	1124x38.5x67 mm
Weight	3.19 kg
Connector	Cable with DTP
IP-rating	69K
Operating Temp.	-30°C to +40°C
Light Pattern	Driving

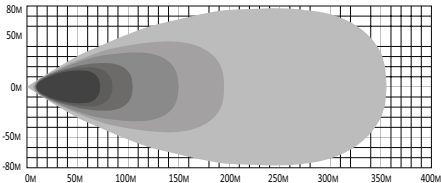

Article. 275-63004




Article. 275-63002 / 275-63003


EDGE LED LIGHT BAR 23"/30"

BriodLights Edge LED light bar has a sloped front, integrated white position light and is aerodynamically optimized to remove wind resistance and repel dirt and snow. It also gives a discreet impression through its minimal dimensions and dark appearance. The Driving Beam light pattern provides a wide and powerful light which is perfect for all driving styles. With the boost function on the light bar measures 8700 (article 275-63002) and 11600 effective lumens (article 275-63003). The light bar comes supplied with both side brackets and top/down sliding back brackets. ECER10. REF:45. 3 year function warranty!

	Article. 275-63002	Article. 275-63003
Length	23" (584 mm)	30" (764 mm)
Bulb Type	LED	LED
Diodes	LEDx12+6	LEDx16+8
Actual Lumens	7060 lm. Boost: 8700 lm	9800 lm. Boost: 11 600 lm
Voltage	9-33 V	9-33 V
Watt at 12 V	105.7 W. Boost: 121.2 W	92 W. Boost: 157 W
Watt at 24 V	98.7 W. Boost: 105.3 W	85 W. Boost 139 W
Nominal Current at 12 V	7.6 A	13 A
Nominal Current at 24 V	3.5 A	5.8 A
Colour Temperature	5000 K	5000 K
1 lux at	500 m	550 m
WxHxD	584x38,5x67 mm	764x38,5x67 mm
Weight	1,7 kg	2,1 kg
Connector	4-PIN DT	4-PIN DT
IP-rating	IP69K	IP69K
Operating Temp.	-30°C to +80°C	-30°C to +80°C
Light Pattern	Driving Beam	Driving Beam

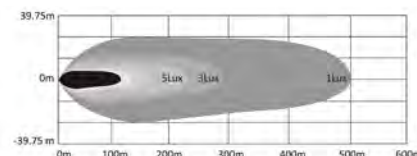

Article. 275-63002

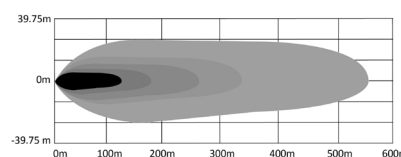

Article. 275-63003




Article. 275-63001

EDGE LED LIGHT BAR 9"

BriodLights Edge LED light bar with a sloped front is aerodynamically optimized to remove wind resistance and repel dirt and snow. The slim light bar gives a discreet impression through its minimal dimensions and dark appearance. The cutting edge optics with a spot light pattern provides an impressive light output that lightens up your way exactly where you want it to. The light bar comes supplied with both side brackets and top/down sliding back brackets. 3 year function warranty!

Article. 275-63001

Length	9" (224 mm)
Bulb Type	LED
Diodes	Osram x 4
Theoretical Lumens	3360 lm
Actual Lumens	2400 lm
Voltage	10-24 V
Watt at 12 V	31 W
Watt at 24 V	30 W
Nominal Current at 12 V	2,35 A
Nominal Current at 24 V	1,67 A
Colour Temperature	5000 K
1 lux at	300 m
WxHxD	224x38,5x67 mm
Weight	0,7 kg
Connector	DT
IP-rating	IP69K
Bulb Type	Aluminium
Operating Temp.	-30°C to +80°C
Light Pattern	Spot

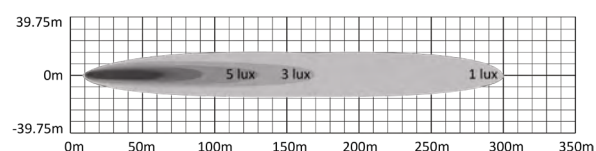

NEW!



INTENSE+ LED LIGHT BAR

Designed to deliver powerful performance and a modern look, Intense+ LED light bars are available in both straight and curved versions to suit different vehicle setups and styling preferences. Every model features an integrated position light in white and amber, allowing you to match your vehicle's appearance while improving visibility on the road. Built with high-quality optics and durable aluminium housing, these light bars provide a wide and evenly distributed beam pattern that enhances visibility without unnecessary glare. Available in multiple lengths and output levels, the range covers everything from compact installations to high-output applications where maximum visibility is essential. 3 year function warranty!



E-APPROVED

	Article. 11160	Article. 11161	Article. 11162	Article. 11163	Article. 11164	Article. 11165
Buld Type	LED	LED	LED	LED	LED	LED
Diodes	12 pcs	24 pcs	40 pcs	60 pcs	80 pcs	96 pcs
Theoretical Lumens	4896 lm	9600 lm	16 000 lm	24 000 lm	32 000 lm	38 400 lm
Actual Lumens	3264 lm	6548 lm	10 352 lm	14 436 lm	17 534 lm	19 469 lm
Voltage	10-30 V	10-30 V	10-30 V	10-30 V	10-30 V	10-30 V
Watt	42 W	84 W	140 W	248.5 W	280 W	336 W
Nominal Current at 12 V	3.66 A	7.6 A	14.1 A	20.71 A	28.06 A	33.21 A
Nominal Current at 24 V	1.93 A	3.91 A	6.8 A	9.9 A	14.1 A	16.5 A
Colour Temperature	5700K	5700K	5700K	5700K	5700K	5700K
1 lux at	471 m	595 m	635 m	696 m	645 m	700 m
LxHxD	203.6x70x67.3 mm	356.6x70x67.3 mm	560.6x70x67.3 mm	815.6x70x67.3 mm	1070.6x70x67.3 mm	1274.6x70x67.3 mm
Connector	DT	DT	ATP	ATP	2.5 m cable	2.5 m cable
IP-rating	IP69K	IP69K	IP69K	IP69K	IP69K	IP69K
Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Lens	PC	PC	PC	PC	PC	PC
Operating Temp.	-30°C to +65°C	-30°C to +65°C	-30°C to +65°C	-30°C to +65°C	-30°C to +65°C	-30°C to +65°C

NEW!



CURVED PROFILE

**INTEGRATED POSITION
LIGHT IN WHITE/AMBER**

	Article. 11166	Article. 11167	Article. 11168	Article. 11169	Article. 11170
Buld Type	LED	LED	LED	LED	LED
Diodes	24 pcs	40 pcs	60 pcs	80 pcs	96 pcs
Theoretical Lumens	9600 lm	16 000 lm	24 000 lm	32 000 lm	38 400 lm
Actual Lumens	7242 lm	10 587 lm	14 978 lm	17 948 lm	19 600 lm
Voltage	10-30 V	10-30 V	10-30 V	10-30 V	10-30 V
Watt	84 W	140 W	210 W	280 W	336 W
Nominal Current at 12 V	7.44 A	13.66 A	20.1 A	28.4 A	32.05 A
Nominal Current at 24 V	4.02 A	7.03 A	9.8 A	14.1 A	16.1 A
Colour Temperature	5700K	5700K	5700K	5700K	5700K
1 lux at	495 m	602 m	665 m	167,7 m	580 m
LxHxD	358.4x70x71.6 mm	563x70x79.2 mm	815.6x70x93.6 mm	1070.6x70x113.7 mm	1271.9x70x131.9 mm
Connector	DT	ATP	ATP	2.5 m cable	2.5 m cable
IP-rating	IP69K	IP69K	IP69K	IP69K	IP69K
Housing	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Lens	PC	PC	PC	PC	PC
Operating Temp.	-30°C to +65°C	-30°C to +65°C	-30°C to +65°C	-30°C to +65°C	-30°C to +65°C



Article. 15250

EXTENDER LED LIGHT BAR 518 MM

BriodLights Extender LED Light bar comes in a curved profile with position lights in a color of white or amber. This LED light bar has a housing fully casted in the highest quality aluminum, making it even more resistant to dirt and moisture. With its dark appearance and minimalistic design the Extender LED lights bar is adaptable to a variety of vehicles and conditions. The light pattern provides a full 7500 measured lumen and reaches 1 lux at 435. 3 year function warranty!


**DYNAMIC START-UP POSITION
LIGHT IN WHITE AND AMBER**



E-APPROVED

Article. 15250

Length	20" (518 mm)
Bulb Type	Die-cast aluminium
Diodes	21 pcs
Actual Lumens	7500 lm
Voltage	10-32 V
Watt	210 W
Nominal Current at 12 V	17,5 A
Nominal Current at 24 V	8,75 A
Colour Temperature	6000 K
1 lux at	460 m
WxHxD	518x50,7x65 mm
Weight	1,64 kg
Connector	4P DT on cable
IP-rating	IP69K
Operating Temp.	-45°C to +65°C
Light Pattern	Driving Beam

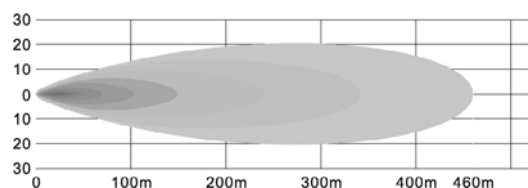






Article. 15239 / 15238

LED LIGHT BAR WITH INTEGRATED WARNING LIGHT


BridgLights LED light bar features both white and yellow position lights, as well as an flashing warning light function. The combo beam light output gives you a versatile driving experience in the dark. The light bar has an extraordinary lifespan thanks to its smoked glass and black powder-coated aluminum housing, which makes it both shock-resistant and waterproof. Stainless steel side and under mounts are included. The light bar is rated IP68 and complies with ECE R112, R10, R7, and CE regulations. 3 year function warranty!



	Article. 15239	Article. 15238
Bulb Type	LED	LED
Diodes	40 pcs	21 pcs
Theoretical Lumens	16 800 lm	8820 lm
Actual Lumens	5550 lm	3586 lm
Voltage	10-30 V	10-30 V
Watt	200 W	105 W
1 Lux at	444 m	459 m
WxHxD	561x70x67 mm	522x40x54 mm
Weight	2.4 kg	1.3 kg
Connector	DT	DT
IP-rating	68K	68K
Housing	Aluminium	Aluminium
Lens	PC	PC
ECE	R10, R65	R10, R65
Colour Temperature	5700 K	5700 K
Cable	1 m	1 m



Article: 15239



Article: 15238



Article. 15220

LED LIGHT BAR WITH POSITION LIGHT

BriodLights LED light bar with position light in white and amber. The ledbar measures 1 lux at 458 m och generates 8100 actual lumens. Comes with brackets for side and bottom mounting. Comes with 4-pin DT-connector. 3 year function warranty!



E-APPROVED



Article. 15227


LED LIGHT BAR CURVED WITH POSITION LIGHT

BriodLights LED Light bar with position light in white and amber. The ledbar measures 1 lux at 480 m and generates 11500 actual lumens. Comes with brackets for side and bottom mounting. 3 year function warranty!




E-APPROVED

Article. 15220	
Length	20" (520 mm)
Bulb Type	LED
Diodes	12x8 W
Actual Lumens	8100 lm
Voltage	9-36 V
Watt	82 W
Nominal Current at 12 V	6,2 A
Nominal Current at 24 V	2,6 A
Colour Temperature	6000 K
1 lux at	458 m
WxHxD	520x40,5x52,5 mm
Weight	1,1 kg
Connector	DT
IP-rating	IP69K
Operating Temp.	-30°C to +45°C
Light Pattern	Driving Beam



Article. 15227	
Length	20" (517 mm)
Bulb Type	LED
Diodes	10x15 W
Actual Lumens	11 500 lm
Voltage	9-36 V
Watt	108 W
Nominal Current at 12 V	8,7 A
Nominal Current at 24 V	4,1 A
Colour Temperature	6000 K
1 lux at	480 m
WxHxD	517x54x65 mm
Weight	2,38 kg
Connector	DT
IP-rating	IP69K
Operating Temp.	-30°C to +45°C
Light pattern	Driving Beam





Article. 15237 / 15229


LED LIGHT BAR WITH TINTED GLASS

BridLights straight LED light bar with double rows of 5 W high-efficiency and high-quality diodes from Osram providing 5500 lumens. The light bar has an extraordinary longevity with a tinted glass and black powder coated aluminum housing, which makes it both shockproof and waterproof. Stainless steel brackets for side and under mounting are included. IP68/IP69K rating, ECE R112, R10, R7 and CE. Ref. no.: HR PL E24 45 / E9. The LED bar has an impressive light pattern and flexible side brackets. The dimensions of the light bars are without bracket. 3 year function warranty!




E-APPROVED

	Article. 15237	Article. 15229
Bulb Type	LED	LED
Diodes	40 pcs	60 pcs
Theoretical Lumens	16 800 lm	25 200 lm
Actual Lumens	5500 lm	7840 lm
Voltage	10-30 V	10-30 V
Watt	200 W	300 W
Nominal Current at 12 V	6,86 A	9,2 A
Nominal Current at 24 V	3,46 A	4,7 A
Colour Temperature	5700 K	5700 K
1 lux at	482 m	485 m
WxHxD	560x70x67 mm	815x70x67 mm
Weight	2,4 kg	3,75 kg
Connector	DT	DT
IP-rating	IP68K	IP69K
Housing	Aluminium	Aluminium
Lens	PC	PC
Operating Temp.	-30°C to +40°C	-30°C to +40°C
Light Pattern	Combo	Combo



Article. 15237



Article. 15229



Article. 15253

LED LIGHT BAR WITH TINTED GLASS

PARKING LIGHT IN
WHITE/AMBER


BriodLights double row lightbar with 5 W Osram LED in black aluminum housing with smoked glass. Stainless steel bracket. 9-36 V, 5700K. Combo Beam. White and orange parking light with dynamic start. Length: 560 mm, height 70 mm, depth 67 mm. IP68/IP69K, E-marked. ref. 50 (lux). ECE R10, R112, R7, CE. Supplied with brackets for side mounting. 40 LED-200 W-16800 lumen. Consumption: 12 V, 7.2 A. Supplied with 130 cm cable with 4-pin DTP connector, male and female. 3 year function warranty!



E-APPROVED

Article. 15253

Bulb Type	LED
Diodes	40 pcs
Theoretical Lumens	16 800 lm
Voltage	9-36 V
Watt	200 W
Nominal Current at 12 V	7,2 A
Colour Temperature	5700 K
1 lux at	430 m
WxHxD	560x70x67 mm
Connector	DT
IP-rating	IP68/69K
Housing	Aluminium
Lens	PC
Operating Temp.	-30°C to +40°C
Light Pattern	Combo



Article. 15253

WORK LIGHTS





Scan the qr-code to
discover all work lights



OLYMPUS

LED WORK LIGHT

NEW!



Bulb type
Color
Diodes
Theoretical Lumens
Effective Lumens
Voltage
Watt
Nominal Current at 12 V
Nominal Current at 24 V
Colour Temperature
1 lux at
WxHxD
Weight
Connector
IP-rating
Position Light
Housing
Lens
Operating Temp.
Light Pattern
EMC, ECE

Article. 15862

LED
 Black
 4 x 20 W
 4570 lm
 3240 lm
 9-32V DC
 60 W
 5.06 A
 2.42 A
 5500K
 55 m
 92x104.5x77 mm
 0.69 kg
 4-pin DT
 IP68
 White/Amber
 Die-cast Aluminium
 PC
 -40°C to +65°C
 Flood
 R10

Article. 15863

LED
 Black
 4 x 20 W
 4570 lm
 3240 lm
 9-32V DC
 60 W
 5.06 A
 2.42 A
 5500K
 55 m
 92x104.5x77 mm
 0.69 kg
 4-pin DT
 IP68
 Red/Amber
 Die-cast Aluminium
 PC
 -40°C to +65°C
 Flood
 R10

Article. 15864


LED
 White
 4 x 20 W
 4570 lm
 3240 lm
 9-32V DC
 60 W
 5.06 A
 2.42 A
 5500K
 55 m
 92x104.5x77 mm
 0.69 kg
 4-pin DT
 IP68
 White/Amber
 Die-cast Aluminium
 PC
 -40°C to +65°C
 Flood
 R10

Article. 15865


LED
 White
 4 x 20 W
 4570 lm
 3240 lm
 9-32V DC
 60 W
 5.06 A
 2.42 A
 5500K
 55 m
 92x104.5x77 mm
 0.69 kg
 4-pin DT
 IP68
 Red/Amber
 Die-cast Aluminium
 PC
 -40°C to +65°C
 Flood
 R10

The Olympus series expands with a new range of work lights that combine powerful illumination, flexible design, and robust construction for professional users. Built with the same focus on functionality, quality, and durability as the rest of the Olympus family, these work lights are designed to deliver reliable performance in demanding working environments. The range is available in two sizes. The smaller 60 W model delivers 3,240 effective lumens and reaches 55 meters at 1 lux, while the larger 90 W model produces 4,820 effective lumens with a range of 76 meters at 1 lux. Both models feature a wide flood beam pattern, a 5,500 K color temperature, IP68 protection, and a durable die-cast aluminium housing built to withstand tough conditions.

Both versions come with an integrated backlit position light, available in either white/amber or red/amber configurations. The combination of powerful work lighting and a discreet backlit position light ensures the lamps not only enhance visibility but also contribute to the overall appearance of the vehicle. 3 year function warranty!



1 lux at 55 m



1 lux at 76 m

INTEGRATED BACKLIT
POSITION LIGHT

RED/AMBER OR WHITE/AMBER
POSITION LIGHT

AVAILABLE
IN BLACK & WHITE

	Article. 15866	Article. 15867	Article. 15868	Article. 15869
Bulb type	LED	LED	LED	LED
Color	Black	Black	White	White
Diodes	6 x 20 W	6 x 20 W	6 x 20 W	6 x 20 W
Theoretical Lumens	6830 lm	6830 lm	6830 lm	6830 lm
Effective Lumens	4820 lm	4820 lm	4820 lm	4820 lm
Voltage	9-32V DC	9-32V DC	9-32V DC	9-32V DC
Watt	90 W	90 W	90 W	90 W
Nominal Current at 12 V	7.67 A	7.67 A	7.67 A	7.67 A
Nominal Current at 24 V	3.8 A	3.8 A	3.8 A	3.8 A
Colour Temperature	5500K	5500K	5500K	5500K
1 lux at	76 m	76 m	76 m	76 m
WxHxD	116x130x93.6 mm	116x130x93.6 mm	116x130x93.6 mm	116x130x93.6 mm
Weight	1.15 kg	1.15 kg	1.15 kg	1.15 kg
Connector	4-pin DT	4-pin DT	4-pin DT	4-pin DT
IP-rating	IP68	IP68	IP68	IP68
Position Light	White/Amber	Red/Amber	White/Amber	Red/Amber
Housing	Die-cast Aluminium	Die-cast Aluminium	Die-cast Aluminium	Die-cast Aluminium
Lens	PC	PC	PC	PC
Operating Temp.	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C
Light Pattern	Flood	Flood	Flood	Flood
EMC, ECE	R10	R10	R10	R10




Article. 11150 / 11151 / 11152 / 11153

NEX WORK LIGHT LED


BriodLights NEX is a work light bar with a wide range of applications. The light bar features a robust, powder-coated aluminum housing that makes it both shockproof and waterproof. Easy installation with included brackets. Adjustable brackets for mounting on the back or side mounts are included! 3 year function warranty!




	Article. 11150	Article. 11151	Article. 11152	Article. 11153
Buld Type	LED	LED	LED	LED
Diodes	Osram 10Wx9	Osram 10Wx21	Osram 10Wx33	Osram 10Wx42
Theoretical Lumens	10800 lm	25200 lm	39600 lm	50400 lm
Actual Lumens	3290 lm	7163 lm	11462 lm	13348 lm
Voltage	10-30 V	10-30 V	10-30 V	10-30 V
Watt	34.9W	210 W	330 W	420 W
Nominal Current at 12 V	2,91 A	6,65 A	10,83 A	12,22 A
Nominal Current at 24 V	1,43 A	3,35 A	5,28 A	6,76 A
Colour Temperature	5000 K	5000 K	5000 K	5000 K
1 lux at	74.8 m	118,3 m	148,2 m	167,7 m
LxHxD	246x47x54 mm	522x47x54 mm	798x47x54 mm	1005x47x54 mm
Weight	680,9 g	1274,5 g	2013,5 g	2433 g
Connector	DT	DT	ATP	ATP
IP-rating	IP69K	IP69K	IP69K	IP69K
Housing	Aluminium	Aluminium	Aluminium	Aluminium
Lens	PC	PC	PC	PC
Operating Temp.	-30°C to +65°C	-30°C to +65°C	-30°C to +65°C	-30°C to +65°C
Light Pattern	Flood	Flood	Flood	Flood




Article. 11150



Article. 11151



Article. 11152



Article. 11153



Article. 11154 / 11155

NEX WORK LIGHT LED WITH WARNING LIGHT


BriodLights NEX work light bar with integrated warning light and position light in white/amber. The work light has a robust, powder-coated aluminum housing that makes it both shockproof and waterproof. Easy installation with included brackets. Adjustable brackets for mounting on the back or side are included! CE, ECE R10, RoHS, IP69K. 3 year function warranty!

**INTEGRATED POSITION
LIGHT IN WHITE AND
AMBER**




E-APPROVED

	Article. 11154	Article. 11155
Bulb Type	LED	LED
Diodes	Osram 10Wx21	Osram 10Wx33
Theoretical Lumens	25200 lm	39600 lm
Actual Lumens	6792 lm	10571 lm
Voltage	10-30 V	10-30 V
Watt	210 w	330 W
Nominal Current at 12 V	6,82 A	10,96 A
Nominal Current at 24 V	3,32 A	5,15 A
Colour Temperature	5000 K	5000 K
1 lux at	108,3 m	144.4 m
LxHxD	522x47x54 mm	798x47x54 mm
Weight	1285 g	2030 g
Connector	N/A	N/A
IP-rating	IP69K	IP69K
Housing	Aluminium	Aluminium
Lens	PC	PC
Operating Temp.	-30°C to +65°C	-30°C to +65°C
Light Pattern	Flood	Flood



Article. 11154



Article. 11155

MEET BRIOD AMBASSADOR ALEXANDER LAANEN

When you build a truck from the ground up, every detail matters. Not just how it looks in daylight, but how it performs in the dark. For Alexander Laanen, lighting is not an afterthought. It is part of the foundation. Alexander's latest build is the result of years of ideas, refinement and deliberate choices. It represents his company, his identity and his standards. It also represents BriodLights.

At the front, Alexander chose Olympus 2.0 as the primary driving light solution.

"With Olympus 2.0, BriodLights has a real winning product. These driving lights perform beyond expectations. I simply don't feel the need to add more."

To ensure full visibility during loading, roadside work and tight maneuvers, Alexander installed several NEX work light bars in different sizes – 798 mm and 522 mm, along with the compact 157 mm work light. This combination gives him consistent flood lighting around the entire rig, eliminating blind spots and creating a controlled working environment in all conditions. An added advantage is the integrated warning light function, which clearly signals to other road users when work is being carried out alongside the road.

The lighting signature is completed with 49 pcs position lights in white and yellow, together with 25 pcs rear lights from Fristom. Because the truck is predominantly black, dark position lights were mounted on stainless steel details from RST-Steel, creating a distinctive profile. With four LEDs per unit, they form a clear and recognizable outline that makes the vehicle visible both in daylight and in complete darkness.

"The result is something I fully stand behind and am proud of. It represents me and my company. Being an ambassador for BriodLights, adds an added value to this build. "



”

The collaboration with BriodLights works very well. It's easy to stand behind products that perform the way they do.

**FASTER
HARDER
BRIGHTER
SCOOTER**



Article. 25951


BRIODLIGHTS NEX 246 MM + HD FRONT BAR BRACKET

Mounting brackets with NEX work light bar designed for snowmobiles. This kit includes the BriodLights NEX 246 mm work light bar, providing powerful and reliable illumination in demanding conditions. The brackets are designed for installation on an HD front bar (with two mounting holes on each side), ensuring a secure and stable fit.

The lighting unit is included in the kit (article no. 11150). If you wish to purchase the brackets without the light, they are available separately under article no. 25950.



NEX WORK LIGHT BAR WITH MOUNT
Article. 25951

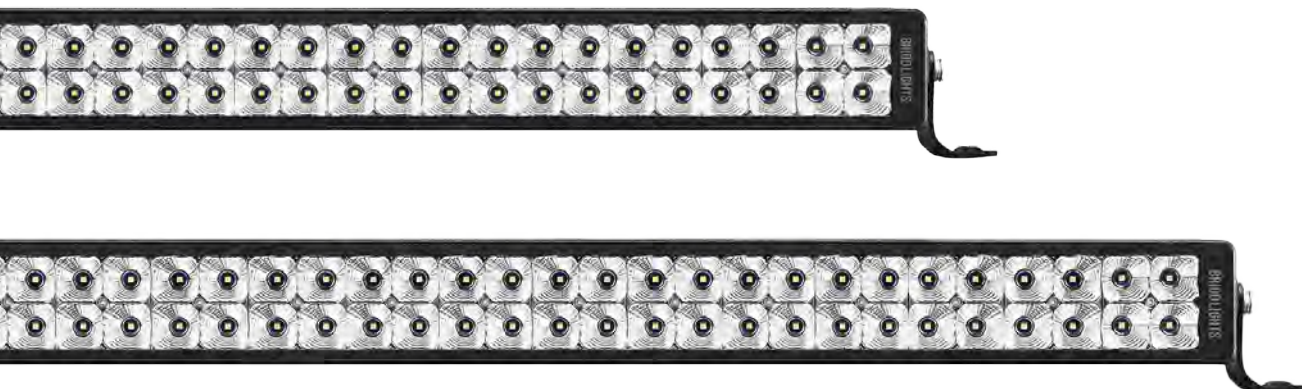

Article. 15235 / 15234


WORK LIGHT LED DOUBLE ROW

Bridgeline 805 and 550 mm straight LED work light bar with double rows of 5 W high-efficiency and high-quality diodes from Osram. The light bar has an extraordinary lifespan with a black powder coated aluminum housing, which makes it both shockproof and waterproof. Flood Beam for safe driving in the dark. Stainless steel brackets for side and under mounting included. IP68 rating, ECE R10. The LED bar has an impressive light pattern and flexible side brackets. Light bar dimensions are without bracket. 3 year function warranty!




E-APPROVED

	Article. 15235	Article. 15234
Bulb Type	LED	LED
Diodes	40 pcs	60 pcs
Theoretical Lumens	16800 lm	25200 lm
Actual Lumens	8200 lm	9500 lm
Voltage	9-36 V	9-36 V
Watt	200 W	300 W
Colour Temperature	6000 K	6000 K
1 lux at	194 m	245 m
WxHxD	550x68x54 mm	805x68x54 mm
Connector	Cable 1 m	Cable 1 m
IP-rating	68K	68K
Housing	Aluminium	Aluminium
Lens	PC	PC
ECE	R10	R10
Light Pattern	Flood Beam	Flood Beam

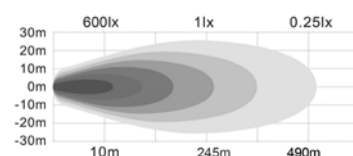

Article: 15234

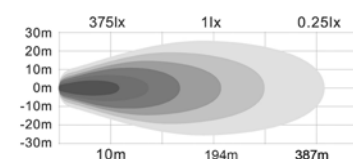

Article: 15235



Article. 11803


TRIO LED WORK LIGHT

BriodLight's Trio Work Light LED is a stylish, stable and reliable work light with integrated warning light. Trio Work Light LED is a flexible LED work light with a compact design and 9 high-quality diodes from Osram. Trio reaches 1 lux at 77 m and emits 4032 lumens. 3 year function warranty!



E-APPROVED

	Article. 11803
Bulb Type	LED
Diodes	9 pcs
Theoretical Lumens	5220 lm
Actual Lumens	4032 lm
Voltage	12-48 V
Watt	40,55 W
Nominal Current at 12 V	3.4 A
Nominal Current at 24 V	1.7 A
Colour Temperature	6000 K
1 lux at	77 m
WxHxD	102x100,8x62,5 mm
Weight	0,77 kg
Connector	10 cm cable with DT
IP-rating	IP69K
Housing	Aluminium
Lens	PC
Operating Temp.	-40°C to +60°C
Light Pattern	Flood





Article. 15241


WORK LIGHT LED 1920 LM

This work light featured a sleek dark lens and 4x5 W Osram diodes. The lamp produces 1440 effective lumens at a color temperature of 5700K, offering a bright and even flood beam pattern ideal for close-range work areas.

Built for professional use, the aluminum housing ensures durability, while the black stainless steel bracket provides stable mounting even in demanding conditions. Includes a 500 mm cable with a DT male and female connector for quick installation. An integrated temperature control system prevents overheating and ensures consistent performance over time. 3 year function warranty.



Bulb Type	LED
Diodes	4 pcs
Theoretical Lumens	1920 lm
Actual Lumens	1440 lm
Voltage	10-30 V
Watt	23,4 W
Colour Temperature	5700 K
1 lux at	63 m
WxHxD	69x64x60 mm
Connector	DT
IP-rating	67
Housing	Aluminium
Lens	PC
Cable	0.5 m

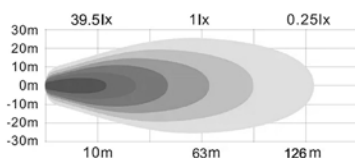

Article. 15249


WORK LIGHT LED 8400 LM


The BriodLights dual-function LED light combines a powerful work light and a side warning light in one compact unit. Featuring a dark lens with 4x10 W Osram LEDs at the front and 6x5 W Osram LEDs on the sides, it provides a wide 140° flood beam for maximum visibility around the vehicle.

Built for professional use, this light delivers 8400 raw lumens and 2140 effective lumens at 5700 K, ensuring both performance and reliability. The durable aluminum housing and black stainless steel bracket make it ideal for demanding environments. Approved as a reversing light according to ECE R23. (Note: not approved as a warning light according to R65). 3 year function warranty.



Bulb Type	LED
Diodes	10 pcs
Theoretical Lumens	8400 lm
Actual Lumens	2140 lm
Voltage	10-30 V
Watt	30 W
Colour Temperature	5700 K
1 lux at	63 m
WxHxD	97x86x75 mm
Connector	DT
IP-rating	69K
Housing	Aluminium
Lens	PC
Cable	0.5 m



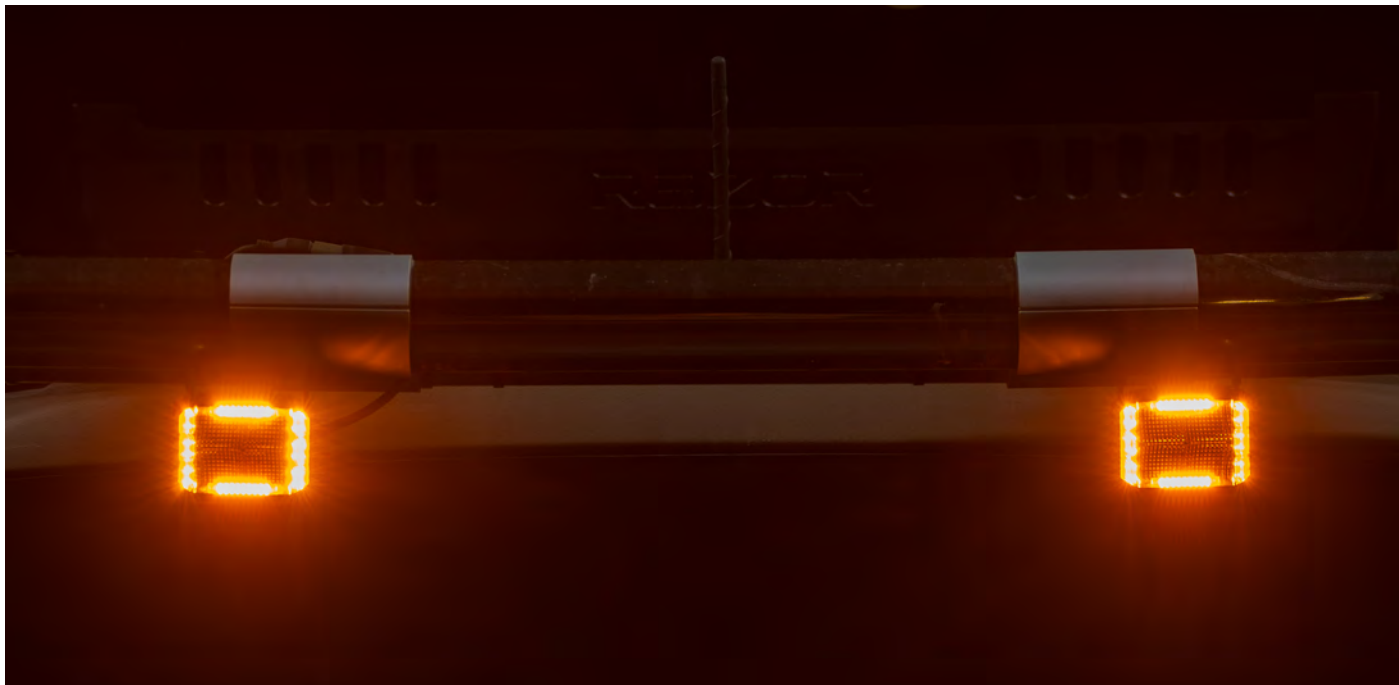



Article. 11111

ENRICH LED WORK LIGHT 2200 LM

A flexible LED work light from BriodLights with compact design and 4 high quality diodes from Osram. The work light is equipped with a temperature control system that automatically reduces the lumen output and protects the lamp from overheating. RoHS. EMC. ECE R10. Approved as reverse light. 3 year function warranty.



Bulb Type	LED
Diodes	Osram 6Wx4
Theoretical Lumens	2750 lm
Actual Lumens	2200 lm
Voltage	10-30 V
Watt	24 W
Nominal Current at 12 V	1,29 A
Nominal Current at 24 V	2,47 A
Colour Temperature	5000 K
1 lux at	50 m
WxHxD	10,4x94,7x41 mm
Weight	0,35 kg
Connector	50 cm Cable with DT
IP-rating	IP69K
Housing	Aluminium
Lens	PC
Operating Temp.	-30°C to +40°C
Light Pattern	Flood 120°





Article. 11122

ENRICH LED WORK LIGHT 5200 LM

A flexible LED work light from BriodLights with compact design and 9 high quality diodes from Osram. The work light is equipped with a temperature control system that automatically reduces the lumen output and protects the lamp from overheating. RoHS. EMC. ECE R10. 3 year function warranty.



Bulb Type	LED
Diodes	Osram 6Wx9
Theoretical Lumens	7360 lm
Actual Lumens	5200 lm
Voltage	10-30 V
Watt	54 W
Nominal Current at 12 V	5,32 A
Nominal Current at 24 V	2,76 A
Colour Temperature	5000 K
1 lux at	71 m
WxHxD	101x114,4x45 mm
Weight	0,55 kg
Connector	50 cm Cable with DT
IP-rating	IP67
Housing	Aluminium
Lens	PC
Operating Temp.	-30°C to +40°C
Light Pattern	Flood 120°

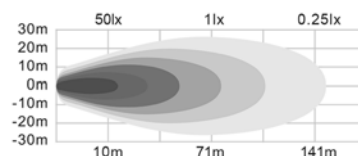



Article. 11113


ENRICH LED WORK LIGHT 7400 LM

A flexible LED work light from BriodLights with compact design and 16 high quality diodes from Osram. The work light is equipped with a temperature control system that automatically reduces the lumen output and protects the lamp from overheating. RoHS. EMC. ECE R10. 3 year function warranty.



E-APPROVED

Bulb Type	LED
Diodes	Osram 6Wx16
Theoretical Lumens	9250 lm
Actual Lumens	7400 lm
Voltage	10-30 V
Watt	96 W
Nominal Current at 12 V	7,65 A
Nominal Current at 24 V	3,7 A
Colour Temperature	5000 K
1 lux at	89 m
WxHxD	111,9x127x55 mm
Weight	1,1 kg
Connector	DT
IP-rating	IP69K
Housing	Aluminium
Lens	PC
Operating Temp.	-30°C to +40°C
Light Pattern	Flood 120°

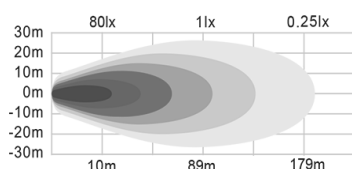

Article. 11121


ENRICH LED WORK LIGHT 4200 LM

BriodLights work light with 27 x 1.5 W Osram LED's. 10-30 V. 46 W. Power consumption: 3.89 A at 12 V. Dimensions: 100 mm x 100 mm. Height with bracket: 122 mm, depth: 40 mm. Supplied with a 500 mm cable with DT connector. IP68/IP69K. Approved according to R10/ CISPR25 Class 3. Built-in temperature control allows the light to regulate brightness in case of overheating. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	9 pcs
Actual Lumens	4200 lm
Voltage	10-30 V
Watt	40 W
Nominal Current at 12 V	3,89 A
Colour Temperature	5700 K
1 lux at	68 m
WxHxD	100x100x40 mm
Connector	DT
IP-rating	IP67
Housing	Aluminium
Lens	PC
Light Pattern	Wide Beam

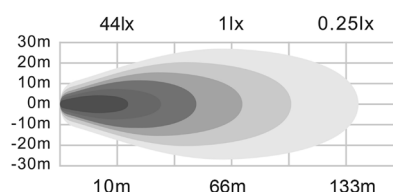



Article. 11213

LED WORK LIGHT 3200 LM

BriodLights LED work light with wide beam pattern. 60 degrees. 9–36 V. Power consumption: 36 W. Dimensions: 110 mm x 109 mm. Height with bracket: 135 mm, depth: 43 mm. Supplied with a 300 mm cable from the light. IP68. R10 approved. 5700 K. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	9 pcs
Actual Lumens	3200 lm
Voltage	9–36 V
Watt	36 W
Colour Temperature	5700 K
WxHxD	100x109x43 mm
Weight	0.529 kg
Connector	Cable 0.3 m
IP-rating	IP68
Housing	Aluminium
Lens	PC
Light Pattern	Wide Beam



Article. 11123


LED WORK LIGHT FLOOD

BriodLights Work Light LED Flood is a flexible work lamp with a voltage range of 10–30 V. With flood light image, compact design and 9 high quality diodes from Osram. The work lamp is easy to mount and connects with 0.5 cable with DT connector. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	9 pcs
Theoretical Lumens	2430 lm
Actual Lumens	1365 lm
Voltage	10–30 V
Watt	13,5 W
Nominal Current at 12 V	1,25 A
Nominal Current at 24 V	0,625 A
Colour Temperature	6000 K
1 lux at	97 m
WxHxD	100x129x40 mm
Weight	0.529 kg
Connector	DT
IP-rating	IP67
Housing	Aluminium
Lens	PC
Operating Temp.	–20°C to +45°C
Light Pattern	Flood Beam

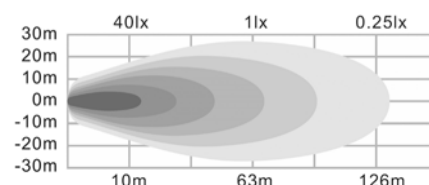




Article. 11124

LED WORK LIGHT SPOT

A compact LED work light from BriodLights. The work light is easy to mount and connects with 0.5 m cable with DT connector. The lamp housing is made of aluminum and with IP67 and IP69K, the lamp is both dustproof and highly water resistant. CE, RoHS & E approved. 3 year function warranty!



Bulb Type	LED
Diodes	9 pcs
Theoretical Lumens	2430 lm
Actual Lumens	1365 lm
Voltage	10-30 V
Watt	13,5 W
Nominal Current at 12 V	1,25 A
Nominal Current at 24 V	0,625 A
Colour Temperature	6000 K
1 lux at	97 m
WxHxD	100x129x40 mm
Weight	0.529 kg
Connector	DT
IP-rating	IP67
Housing	Aluminium
Lens	PC
Operating Temp.	-20°C to +45°C
Light Pattern	Spot

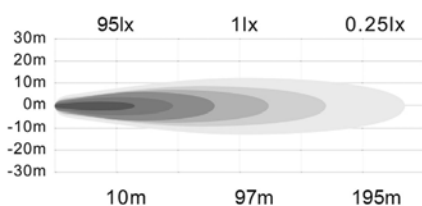


Article. 11810

LED WORK LIGHT MINI 1070 LM

A small and flexible work light LED that effectively illuminates the closest area around the vehicle. The work light is easy to mount thanks to its minimal dimensions of 53x49x84 mm and is therefor excellent as a work light on a majority of vehicles. Cable with DT connector included. 3 year function warranty!



Bulb Type	LED
Diodes	1x15 W
Theoretical Lumens	1500 lm
Actual Lumens	1070 lm
Voltage	9-32 V
Watt	15 W
Nominal Current at 12 V	0,8 A
Nominal Current at 24 V	0,4 A
Colour Temperature	6000 K
1 lux at	50 m
WxHxD	53x49x84 mm
Weight	0,4 kg
Connector	DT
IP-rating	IP68
Housing	Aluminium
Operating Temp.	-40°C to +85°C
Light Pattern	Flood





Article. 11116


LED WORK LIGHT 900 LM

A flexible LED work light from BriodLights with compact design and 8 high quality diodes from Osram wich generates 900 actual lumens. The work light has a mounting bracket in stainless steel that can rotate 180° and is easily connected with a 50 cm DT cable. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	8 pcs
Theoretical Lumens	12 00 lm
Actual Lumens	900 lm
Voltage	10-30 V
Watt	11,2 W
Nominal Current at 12 V	0.75 A
Nominal Current at 24 V	0.43 A
Colour Temperature	6000 K
1 lux at	36 m
WxHxD	52.7x75.4x32.2 mm
Colour Temperature	6000 K
Connector	DT with 50 cm cable
IP-rating	IP68
Housing	Aluminium
Lens	PC
Operating Temp.	-30°C to +40°C
Light Pattern	Flood

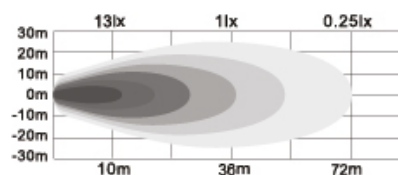





Article. 11117


ENRICH 2.0 LED WORK LIGHT 2260 LM

Enrich 2.0 2260 lm is a flexible LED work light. With its stylish, compact design and elegant black lamp housing, it provides even light distribution throughout the work area. Equipped with a temperature control system. RoHS, CE, EMC and ECE R10. Approved as a reversing light. 3 year function warranty.



E-APPROVED

Bulb Type	LED
Diodes	8 pcs
Actual Lumens	2260 lm
Voltage	10-30 V
Watt	20 W
Nominal Current at 12 V	1,62 A
Nominal Current at 24 V	0,82 A
Colour Temperature	5000 K
1 lux at	48 m
WxHxD	70x90x36 mm
Weight	0,25 kg
Connector	DT
IP-rating	IP69K
Housing	Aluminium
Lens	PC
Operating Temp.	-30°C to +40°C
Light Pattern	Wide

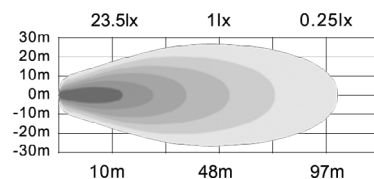



E9 10R 06 23479



Article. 11118


ENRICH 2.0 LED WORK LIGHT 4498 LM

Enrich 2.0 4498 lm is a flexible LED work light. With its stylish, compact design and elegant black lamp housing, it provides even light distribution throughout the work area. Equipped with a temperature control system. RoHS, CE, EMC and ECE R10. 3 year function warranty.



E-APPROVED

Bulb Type	LED
Diodes	12 pcs
Actual Lumens	4498 lm
Voltage	10-30 V
Watt	60 W
Nominal Current at 12 V	3,45 A
Nominal Current at 24 V	1,7 A
Colour Temperature	5000 K
1 lux at	49 m
WxHxD	92x109.5x45 mm
Weight	0,65 kg
Connector	Dt
IP-rating	IP69K
Housing	Aluminium
Lens	PC
Operating Temp.	-40°C to +80°C
Light Pattern	Wide

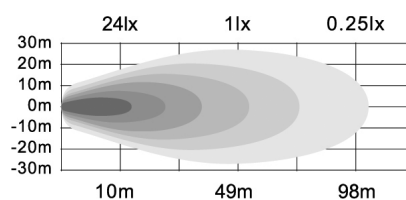


Article. 11119

ENRICH 2.0 LED WORK LIGHT 3580 LM

Enrich 2.0 3580 lm is a flexible LED work light. With its stylish, compact design and elegant black lamp housing, it provides even light distribution throughout the work area. Equipped with a temperature control system. RoHS, CE, EMC and ECE R10. 3 year function warranty.



Bulb Type	LED
Diodes	12 pcs
Actual Lumens	3580 lm
Voltage	10-30 V
Watt	60 W
Nominal Current at 12 V	1,95 A
Nominal Current at 24 V	0,89 A
Colour Temperature	5000 K
1 lux at	61 m
WxHxD	115x84x47 mm
Weight	0,65 kg
Connector	DT
IP-rating	IP69K
Housing	Aluminium
Lens	PC
Operating Temp.	-40°C to +80°C
Light Pattern	Extra Wide

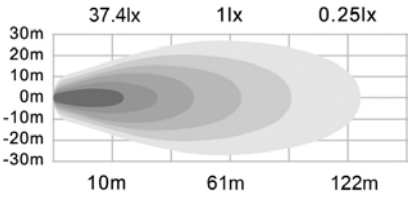



Article. 274-4024

LED WORK LIGHT OVAL 2400 LM

An oval LED work light from BriodLights that has 8x3 W CREE diodes, a wide beam pattern and a lifespan of 50,000 hours. The work light provides 1660 lm, has an output of 24 W and 9-32 V. E-aproved. EMC. 3 year function warranty!



E-APPROVED

Bulbtype	LED
Diodes	8x3 W Cree
Theoretical Lumens	2400 lm
Actual Lumens	1600 lm
Voltage	9-32 V
Watt	24 W
Colour Temperature	6000 K
WxHxD	140x96x60 mm
Connector	DT
IP-rating	68
Housing	Aluminium
Lens	PC
ECE	R10
Operating Temp.	-40°C to +85°C
Light Pattern	Flood



Article. 274-4044



LED WORK LIGHT OVAL 2790 LM

A LED work light from BriodLights with 360 degree rotatable side bracket and 8x5 W CREE diodes. The Flood beam work light has a light output of 2790 lm.



E-APPROVED

Bulb Type	LED
Diodes	8x5 W Cree
Theoretical Lumens	4000 lm
Actual Lumens	2790 lm
Voltage	9-32 V
Watt	40 W
Colour Temperature	6000 K
WxHxD	142x96x89 mm
Connector	DT
IP-rating	68
Housing	Aluminium
Lens	PC
ECE	R10
Operating Temp.	-40°C to +85°C
Light Pattern	Flood



Article. 15242


LED WORK LIGHT RECESSED DARK

BriodLights Recessed work light dark glass with 6 LED Osram diodes. Supplied with 50 cm long cable from the lamp with DT connector both male and female. NOTE! This lamp is mounted recessed.



E-APPROVED

Bulb Type	LED
Diodes	6 pcs
Theoretical Lumens	2880 lm
Actual Lumens	2000 lm
Voltage	10-30 V
Watt	30 W
Nominal Current 12 V	2,64 A
Nominal Current 24 V	1,33 A
Colour Temperature	5700 K
1 lux at	63 m
WxHxD	196x62x53 mm
Weight	0.5 kg
Connector	Cable 0.5 m
IP-rating	IP69K
Housing	Aluminium
Lens	PC
Operating Temp.	-30°C to +40°C
Light Pattern	Wide

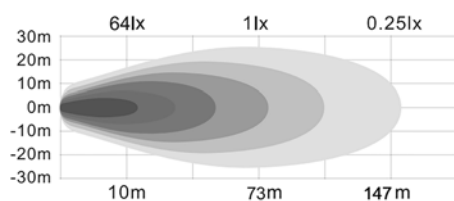

Article. 15233

LED WORK LIGHT WITH WARNING LIGHT




BriodLights LED work light with integrated warning light and 6x5W high-quality diodes from Osram. With 1 lux at 53 m and an actual light output of 1730 lm, the work light provides a very efficient light. Comes with black stainless steel bracket including rubber gasket. 3 year function warranty!



E-APPROVED

Article.
15233

Bulb Type	LED
Diodes	6x5W Osram
Theoretical Lumens	2280 lm
Actual Lumens	1730 lm
Voltage	10-30 V
Watt	26 W
Nominal Current 12 V	1,86 A
Nominal Current 24 V	0,95 A
Colour Temperature	5700 K
1 lux at	53 m
WxHxD	157x49.7x60 mm
Weight	0.47 kg
Connector	DT
IP-rating	IP69K
Housing	Aluminium
Lens	PC
Operating Temp.	-30°C to +40°C
Light Pattern	Flood 90°

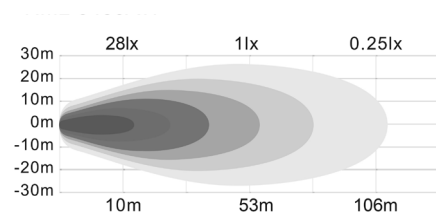





Article. 15232

LED WORK LIGHT 157 MM


BriodLights LED work light with 6x5W high-quality diodes from Osram. With 1 lux at 73 m and an actual light output of 2280 lm, the work light provides a very efficient light. Comes with black stainless steel bracket including rubber gasket. 3 year function warranty!



E-APPROVED

Article.
15232

Bulb Type	LED
Diodes	6x5W Osram
Theoretical Lumens	2280 lm
Actual Lumens	2000 lm
Voltage	10-30 V
Watt	30 W
Nominal Current 12 V	2.64 A
Nominal Current 24 V	1.33 A
Colour Temperature	5700 K
1 lux at	73 m
WxHxD	157x49.7x60 mm
Weight	0.47 kg
Connector	DT
IP-rating	IP69K
Housing	Aluminium
Lens	PC
Operating Temp.	-30°C to +40°C
Light Pattern	Flood 90°

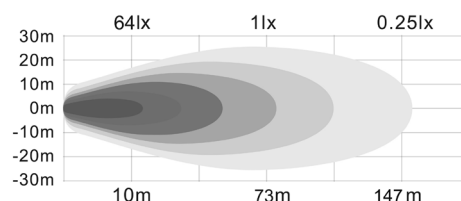






Article. 274-1918

LED WORK LIGHT MINI 160 MM

Fierce mini is a flexible LED work light from BriodLights with compact design and 6 high-quality diodes from Osram. With 1 lux at 45 m, the work light provides a very efficient light. IP69K. ECE R10. RoHS. 3 year function warranty!



Bulb Type	LED
Diodes	6x3W Osram
Theoretical Lumens	1620 lm
Actual Lumens	970 lm
Voltage	10-30 V
Watt	18 W
Nominal Current 12 V	1,4 A
Nominal Current 24 V	0,7 A
Colour Temperature	6000 K
WxHxD	160x45x63 mm
Connector	DT
Housing	Aluminium
Lens	PC
Operating Temp.	-20°C to +45°C
Light Pattern	Flood

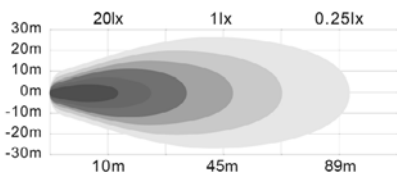


Article. 11510

LED WORK LIGHT A10 ANGLED

BriodLights NO GLARE LED work light has a design that is particularly suitable for vehicles that work in tight and confining spaces. The work light is mounted directly on the vehicle wall and thanks to the angled front the work light generates an even spread of light that illuminates the area around the vehicle without dazzling. 3 year function warranty!



Bulb Type	LED
Diodes	42 pcs
Theoretical Lumens	3000 lm
Voltage	12-24 V
Watt	35 W
Nominal Current at 12 V	1,14 A
Nominal Current at 24 V	1,36 A
Colour Temperature	6000 K
1 lux at	34 m
WxHxD	200x63x55 mm
Weight	0,49 kg
Cable	5 m ADR cable
Housing	Aluminium
Lens	PC
Operating Temp.	-40°C to +65°C
Light Pattern	Flood

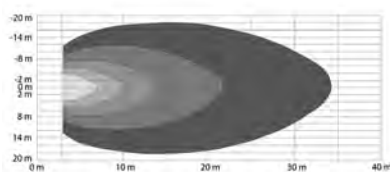



Article. 15210

LED WORK LIGHT ANGLED

BriodLights LED work light has a unique movable mount that is suitable for both side and rear mounting. The work light is specially adapted for tractors and has a wide asymmetric light pattern. Delivered with 30 cm cable with 2-pin DT connector. IP68. ECE R10 approved. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	10 pcs
Theoretical Lumens	5600 lm
Actual Lumens	4400 lm
Voltage	9-36 V
Watt	60 W
Nominal Current at 12 V	5,5 A
Nominal Current at 24 V	2,8 A
Colour Temperature	5700 K
1 lux at	144 m
WxHxD	150x90x88 mm
Weight	0,8 kg
Housing	Aluminium
Lens	Pmma
Operating Temp.	-40°C to +60°C
Light Pattern	Flood



Article. 15223



LED HEADLIGHT WITH HEATED LENS

BriodLights Combination headlight/plow light LED with low beam, high beam and parking light with heating in the glass. (Automatic heating element that switches on at 4 degrees Celsius). Supplied with indicators that can be attached to the sides or top of the lamp. Supplied with a 6-pin DT connector on the back. The headlight is designed for both right and left side. Dimensions: 215 mm with turn signal, height to bracket 176 mm. Low beam 1800 lm, 163 m 1 Lux. High beam 3600 lm, 280 m 1 Lux. 3 year function warranty!



E-APPROVED

Bulb Type	LED
WxHxD	150x150x85 mm
Lumens low beam	1800 lm
Lumens high beam	3600 lm
1 lux at	280 m
Connector	DT
IP-rating	68
Housing	Aluminium

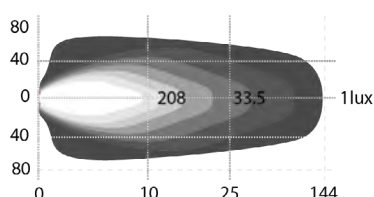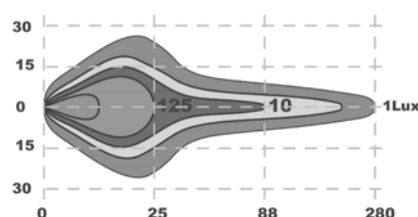

Article. 272-90415

LED HEADLIGHT WITH FOUR FUNCTIONS


E-approved LED headlight with four different functions: low beam, high beam, position light and indicators. The headlight is universal thanks to the option of having the indicator function both on top of the light and on the right or left side. The headlight also has a heated lens, which prevents snow and ice to stick on the glass. If the lens has a 5 mm thick layer of ice and the outside temperature is -25°C, it will take about an hour for the device's temperature to rise to 68°C. R112, R6, R7. 3 year function warranty!



E-APPROVED



Bulb Type	LED
WxHxD (with brackets)	229x170x80 mm
WxHxD (without brackets)	229x150x80 mm
Voltage	10-30 V
Watt	38 W
Lumens low beam	1800 lm
Lumens high beam	3600 lm
Connector	40 cm cable with 6-pol DT
Mount	M10 bolt
IP-rating	68
Housing	Aluminium
EMC	R10
Operating Temp.	-40°C to +60°C

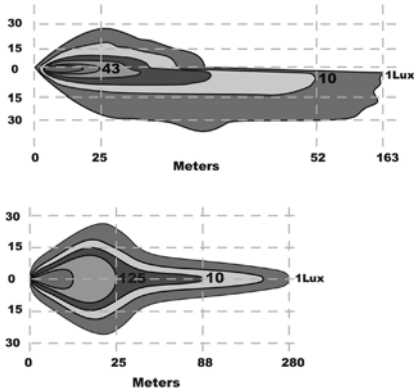

Article. 15770


LED COMBINATION HEADLIGHT

This LED Combination Headlight is designed to deliver reliable performance, excellent visibility and long-lasting durability in demanding conditions. Combining low beam, high beam and integrated position light in one compact unit, it offers a complete lighting solution for trucks, construction vehicles, agricultural machinery and other professional applications.

With up to 1567 actual lumens on high beam and a reach of 264 meters at 1 lux, the headlight provides a clear and focused light pattern that improves visibility and safety on the road. Built with a robust aluminium housing and a durable polycarbonate lens, the lamp is engineered to withstand harsh environments. With IP67 and IP69K ratings, it offers excellent protection against water, dust and vibration, ensuring dependable performance. ECE R112, R7, R10. 3 year function warranty!



Bulb Type	LED
Theoretical Lumens	5000 lm (low beam) / 10 000 lm (high beam)
Actual Lumens	770 lm (low beam) / 1567 lm (high beam)
Voltage	10-30 V DC
Watt	25 W
Nominal Current 12 V	2.08 A
Nominal Current 24 V	1.04 A
Colour Temperature	5700 K
1 lux at	135 m (low beam) / 264 m (high beam)
WxHxD	151x172x126 mm
Connector	4-pin DT, 30 cm cable
IP-rating	IP67, IP69K
Position light	Yes
Housing	Aluminium
Lens	PC
Operating Temp.	-40°C to +50°C
Approvals	ECE R112, R7, R10

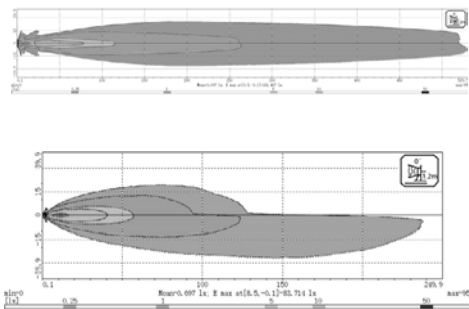

WARNING LIGHTS





Scan the qr-code to
discover all warning lights





STREAMLINE LED WARNING LIGHT BAR

BriodLights Streamline warning light bars come in eight different lengths, ranging from 30" to 72". Designed with a straightforward cable connection and no remote control, they integrate easily into any switch or control panel. Featuring automatic night dimming (Class 2) and delivered with fix point brackets. Thanks to their exceptionally low air resistance, they are an ideal choice for electric vehicles. Each light bar is built with removable modular sections, making it simple to replace a single module if needed—reducing downtime and maintenance costs.

The minimalist design also makes Streamline an excellent fit for construction machinery, agricultural equipment, workshop vehicles, transport vans and other professional work vehicles. The warning light is delivered in completely plastic-free packaging. 3 year function warranty!



E-APPROVED

	Article. 19410	Article. 19411	Article. 19412	Article. 19413	Article. 19414	Article. 19415	Article. 19416	Article. 19417
Bulb Type	LED	LED	LED	LED	LED	LED	LED	LED
Diodes	156 pcs	180 pcs	204 pcs	228 pcs	252 pcs	276 pcs	300 pcs	324 pcs
Flash patterns	14 pcs	14 pcs	14 pcs	14 pcs	14 pcs	14 pcs	14 pcs	14 pcs
LxWxD (mm)	613x218x24,5	766x218x24,5	918x218x24,5	1070x218x24,5	1223x218x24,5 mm	1375x218x24,5	1528x218x24,5	1832x218x24,5
Voltage	12-24 V	54 W	12-24 V	12-24 V	12-24 V	12-24 V	12-24 V	12-24 V
Power at 12 V	53 W	54 W	56 W	57 W	58 W	60 W	61 W	62 W
Power at 24 V	70 W	75 W	77 W	80 W	83 W	87 W	90 W	93 W
Connector	Cable 5 m	Cable 5 m	Cable 5 m	Cable 5 m	Cable 5 m	Cable 5 m	Cable 5 m	Cable 5 m
IP-rating	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Operating temp.	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C	-40°C to +65°C
Lens	PC	PC	PC	PC	PC	PC	PC	PC
ECE	R10, R65	R10, R65	R10, R65	R10, R65	R10, R65	R10, R65	R10, R65	R10, R65

EIGHT DIFFERENT
LENGTHS

AUTOMATIC
NIGHT DIMMING

REMOVABLE
MODULAR SECTIONS

14 FLASH
PATTERNS

FIX POINT
BRACKETS





HORIZON LED WARNING LIGHT BAR

Horizon LED warning light bar has an ultra-thin silhouette of only 24.4 mm, which almost makes the warning light become one with the vehicle. With as many as 13 flash patterns and high-quality diodes, there is plenty of ways to customize the signals however you wish. With today's demands on aerodynamics, the warning light bar is also designed to minimize air resistance. As a result, less fuel is consumed compared to a traditional warning light bar. Horizon is connected with 5 m ADR cable. Lens: PC. CISPR25 CLASS 3 SAE J845, ECE R65 TA2, ECE R10.

For easy control of the warning light you can choose to add the compatible wireless remote control (item no: 14580). The remote control is cordless and recharges in only about two hours. 5 year function warranty!



E-APPROVED

	Article. 14570	Article. 14571	Article. 14583	Article. 14572	Article. 14573	Article. 14581	Article. 14574	Article. 14582
Length	24" (613 mm)	30" (766 mm)	36" (918 mm)	42" (1070 mm)	48" (1223 mm)	54" (1375 mm)	60" (1528 mm)	72" (1832 mm)
Bulb Type	LED	LED	LED	LED	LED	LED	LED	LED
Diodes	108 pcs	132 pcs	156 pcs	180 pcs	204 pcs	228 pcs	252 pcs	300 pcs
Flash patterns	13 pcs	13 pcs	14 pcs	13 pcs	13 pcs	13 pcs	13 pcs	13 pcs
LxWxD (mm)	613x218x24,5	766x218x24,5	918x218x24,5	1070x218x24,5	1223x218x24,5 mm	1375x218x24,5	1528x218x24,5	1832x218x24,5
Voltage	12-24 V	12-24 V	12-24 V	12-24 V	12-24 V	12-24 V	12-24 V	12-24 V
Watt	74 W	82 W	90 W	98 W	106 W	114 W	122 W	138 W
Nominal Current at 24 V	3,08 A	3,42 A	2,47 A	4,08 A	4,42 A	4,89 A	5,08 A	5.75 A
Cabel	5 m ADR	5 m ADR	5 m ADR	5 m ADR	5 m ADR	5 m ADR	5 m ADR	5 m ADR
IP-rating	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
ECE	R65 Class 2	R65 Class 2	R65 Class 2	R65 Class 2	R65 Class 2	R65 Class 2	R65 Class 2	R65 Class 2



AWARDED BY RED DOT
DESIGN AWARDS

ULTRA THIN
ONLY 24.4 MM

WLTP CUSTOMIZED

5 YEAR WARRANTY!



For easy control of your
Horizon LED warning light
bar - add the compatible
wireless remote control!

Article. 14580



NEW!

Article. 14915

LED WARNING LIGHT SUPER THIN VERTICAL



This super thin vertical warning light is designed for applications where maximum visibility must be combined with a discreet and compact installation. Featuring a surface-mounted vertical screw mount design and a depth of only 9 mm, the warning light integrates seamlessly into modern vehicles while delivering powerful amber warning light.

Equipped with 6 high-performance LEDs and 29 selectable warning patterns, the lamp provides excellent visibility in demanding environments. The warning light is approved according to ECE R65 Class 2 and SAE J595, ensuring reliable performance and compliance for professional vehicles operating on public roads.

The robust aluminium housing and impact-resistant polycarbonate lens are built to withstand harsh conditions, while the IPX7 rating protects against water ingress. The included 3-meter ADR cable allows for flexible installation, and synchronization capability for up to 20 units makes it easy to create a coordinated warning system across the vehicle. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	6 pcs
Flash patterns	29 pcs
Voltage	12-24 V DC
Average power	7.2 W
Maximum power	14.4 W
Fuse rating	2 A
Watt	12 W
WxHxD	112,6x28,1x9 mm
IP-rating	IPX7
Connector	3 m ADR
Housing	Aluminium
Lens	PC
Operating Temperature	-30°C to +65°C
ECE	R65 Class 2

ALERT LED WARNING LIGHT 6 DIODES

Alert LED Warning Light with six diodes is designed for discreet installations where high visibility and reliable performance are essential. Its slim and compact design allows it to blend seamlessly into the vehicle while still delivering a powerful amber warning light.

Equipped with 6 high-performance LEDs and 5 selectable warning patterns, the lamp provides effective visibility for a wide range of professional applications. The warning light is ECE R65 Class 2 approved, ensuring compliance with demanding industry standards and excellent visibility in both day and night conditions. The lamp can be installed using the surface-mounted vertical screw mount or the pre-applied 3M adhesive, providing maximum flexibility for different vehicle types and installation requirements.

Supplied with a 3-meter ADR cable and synchronization capability for up to 15 units, this warning light makes it easy to create a coordinated warning system across the vehicle. 3 year function warranty!

**E-APPROVED**

Bulb Type	LED
Diodes	6 pcs
Flash patterns	5 pcs
Voltage	12-24 V DC
Average power	4.8 W
Maximum power	9.6 W
Fuse rating	2 A
WxHxD	127,5x27,8x17,2 mm
IP-rating	IPX7
Connector	3 m ADR
Housing	Aluminium
Lens	PC
Operating Temperature	-30°C to +65°C
ECE	R65 Class 2

NEW!

Article. 14917

ALERT LED WARNING LIGHT 3 DIODES



Alert LED Warning Light with three diodes is a compact and powerful surface-mount warning light designed for professional vehicles, machinery, and equipment requiring reliable visibility in demanding environments. Equipped with three high-performance amber LEDs and five warning patterns, it delivers excellent warning performance while maintaining low power consumption.

The durable aluminium housing and impact-resistant polycarbonate lens ensure long-lasting operation, while the IPX7 protection rating provides resistance against water and harsh weather conditions. This warning light LED supports synchronization of up to 15 units, allowing for coordinated warning light installations on larger vehicles and fleets. Certified according to ECE R65 Class 1 and ADR requirements. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	3 pcs
Flash patterns	5 pcs
Voltage	12-24 V DC
Average power	3.05 W
Maximum power	6.1 W
Fuse rating	2 A
Watt	12 W
WxHxD	85,98x27,66x15,7 mm
IP-rating	IPX7
Connector	3 m ADR
Housing	Aluminium
Lens	PC
Operating Temperature	-30°C to +65°C
ECE	R65 Class 1

Article. 14918

ALERT LED WARNING LIGHT 12 DIODES

Alert LED Warning Light with 12 diodes is a high-performance surface-mount warning light developed for commercial vehicles, emergency applications, machinery, and equipment operating in demanding environments. Featuring 12 high-output amber LEDs and ECE R65 Class 2 approval, it delivers exceptional visibility and warning performance.

Its slim surface-mount design enables seamless integration into vehicle bodies and equipment while maintaining a professional appearance. Constructed with a robust aluminium housing and a durable polycarbonate lens, this warning light is built to withstand harsh weather, vibration, and daily operational wear.

With 25 selectable flash patterns and synchronization capability for up to 15 units, the warning light offers flexible installation options for creating coordinated warning systems with maximum visual impact. 3 year function warranty!

**E-APPROVED**

Bulb Type	LED
Diodes	12 pcs
Flash patterns	25 pcs
Voltage	12-24 V DC
Average power	9 W
Maximum power	18 W
Fuse rating	5 A
WxHxD	131,8x48,7x19,2 mm
IP-rating	IPX7
Connector	3 m ADR
Housing	Aluminium
Lens	PC
Operating Temperature	-30°C to +65°C
ECE	R65 Class 2



Article. 14510

FLEXIBLE WARNING LIGHT R10, R65

BriodLights Flexible Warning Light is designed to deliver a powerful warning signal in a compact and easy-to-install format. The flexible housing allows the light to bend backwards up to 30°, providing increased mounting options even on slightly uneven or curved surfaces.

With 19 selectable flash patterns, the light signal can be easily adapted to different environments and operational needs. The warning light is ECE R65 Class 2 approved, ensuring high light intensity and excellent visibility, and ECE R10 certified for interference-free operation.

Installation is straightforward thanks to the integrated 2-metre cable and a wide operating voltage range of 12–24 V (10–33 V), making it compatible with a wide variety of vehicle and equipment systems. The light mounts quickly and securely using high-strength 3M adhesive tape, eliminating the need for complex installation work.

A reliable and flexible warning light solution for professional applications where visibility and durability matter. 3 year function warranty!



Bulb Type	LED
Diodes	6 pcs
Flash patterns	19 pcs
Voltage	10–33 V
Watt	12 W
WxHxD	111x26x10 mm
IP-rating	IP67
Connector	Cable 2 m
Operating Temperature	–30°C to +60°C
ECE	R10, R65 Aut Class 2



Article. 14511

SLIM WARNING LIGHT R10, R65

BriodLights Slim Warning Light is an ultra-thin warning light designed for applications where a discreet, low-profile installation is essential. With a thickness of just 6.5 mm, it integrates seamlessly into vehicles or equipment without unnecessary protrusion, while still delivering a clear and powerful warning signal.

Despite its compact design, the light offers 19 selectable flash patterns, allowing the signal to be tailored to different environments and operational requirements. It is ECE R65 Class 2 approved for high-intensity warning output and ECE R10 certified to ensure interference-free operation.

Installation is straightforward thanks to the integrated 2-metre cable and a wide operating voltage range of 12–24 V (10–33 V), making the Slim Warning Light easy to connect and compatible with a wide range of electrical systems.

A compact yet powerful warning light solution for professional use where visibility, reliability, and a clean installation matter. 3 year function warranty!



Bulb Type	LED
Diodes	6 pcs
Flash patterns	19 pcs
Voltage	10–33 V
Watt	12 W
WxHxD	122x28x6,5 mm
IP-rating	IP67
Connector	Cable 2 m
Operating Temperature	–30°C to +60°C
ECE	R10, R65 Aut Class 2





Article. 19500

ROTATING WARNING LIGHT

LED rotating warning light from BriodLights with 4 m ADR cable. The warning light has 7 different flash patterns including a fast rotating light. The warning light is only 46.8 mm in height and is 108 mm in diameter. Cable entrance bottom or side. E-approved. 3 year function warranty!



Bulb Type	LED
Flash Patterns	7 pcs
Mount	Flat
Diodes	30 pcs
Height	46,8 mm
Diameter	108 mm
Voltage	12-24 V
Watt	19 W
IP-rating	IP67
Lens	PC
Housing	Aluminium



Article. 19501

ROTATING WARNING LIGHT WITH REMOTE CONTROL

LED Rotating warning light with magnetic mount. The warning light is battery-driven and is activated with a simple push of a button, either directly on the warning light or with the help of the remote control. The light has 6 hours of battery operation and only takes 4 hours to charge. The warning light is easily mounted with the built-in magnet with a combined suction plug.



Bulb Type	LED
Flash Patterns	7 pcs
Mount	Magnetic
Diodes	10 pcs
Height	140 mm
Diameter	130 mm
Voltage	12-24 V
Watt	18 W
IP-rating	IP67
Lens	PC
Housing	Aluminium



Article. 14501

RECHARGEABLE WARNING LIGHT WITH MAGNETIC MOUNT

Rechargeable warning light with magnetic mount is one versatile LED warning light suitable for most occasions when you need to warn your surroundings. The simple magnetic mounting (just place it on a flat metal surface) means that the warning light can be easily mounted and moved between different vehicles and trailers. The lighting is activated with a simple push of a button and has 7 hours battery life. With the battery indicator you can easily keep track of when it's time to charge, and charging only takes about 2.5 hours. Delivered in packaging of 2 pcs. ECER10 & ECER65. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	12 pcs
WxHxD	110x102.6x36.5 mm
Voltage	12-24 V
Watt	5 W
IP-rating	IP67
Operating Temp.	-40°C to +65°C





Article. 14500

ALERT DIRECTIONAL WARNING LIGHT MINI

Alert LED directional warninglight is small and flexible and has a depth of only 13 mm. The warning light has an orange glow with a double flash and it is possible to connect two or more lights so that they are synchronized. The 1.5 m ADR cable included makes the warning light suitable to mount on vehicles for dangerous goods as well. EMC10. ECER65. RoHS. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	12 pcs
Flash Patterns	1 pcs
WxHxD	101x32x13 mm
Voltage	12-24 V
Watt	3,4 W
CC	90 mm
IP-rating	IP67
Operating Temp.	-40°C to +65°C
Connector	Cable



Article. 14550

LED WARNING LIGHT ROTATING

Built-in selective flash patterns, rotating patterns, 7 different modes in total. The integrated light sensor allows automatic switching between day and night mode. The size allows for a wide range of applications such as emergency services, mining, construction, etc. With a low power consumption and with a bright light and with an aluminum base, these features give you the perfect warning light. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Flash Patterns	7 pcs
Mount	Flat
Diodes	20 pcs
Height	83,5 mm
Diameter	169 mm
Voltage	12-24 V
Watt	70 W
IP-rating	IP67
Lens	PC
Housing	Aluminium

REAR LIGHTS





Scan the qr-code to
discover all rear lights






LED REAR LIGHT RING BY FRISTOM CHROMED / BLACK

BriodLights by Fristom is a new range of round LED tail lights designed with trailer enthusiasts in mind and characterized by their unique design and robust durability. The design of the light creates an impressive depth and 3D effect that immediately catches the eye. Not only are these lights visually appealing, but they also significantly improve visibility and contribute to increased road safety.

The LED light offers three functions: position light, brake light and turn signal. The products are available in two frame colors: black, made of high-quality plastic, and chrome, which is coated with a high-quality microporous nickel coating to guarantee corrosion resistance (PREMIUM version intended for the automotive industry). The lamps are recessed, but it is also possible to mount them directly on the body using the COVER body, available as an optional accessory. These rear lights are available with a 1 m cable fitted. The lamp has European approval and electromagnetic compatibility certificate. The products are fully waterproof with high IP69.

3 year function warranty!

	Article. 12550	Article. 12551
Color	Chromed ring	Black ring
Diameter	155 mm	155 mm
Depth	39 mm	39 mm
Bulb Type	LED	LED
Voltage	12-32 V	12-32 V
Watt	74 W	82 W
Nominal Current at 12 V	0,25 A	0,25 A
Nominal Current at 12 V	0,125 A	0,125 A
Power at 12 V	3 W	3 W
Power at 24 V	5 m ADR	5 m ADR
Weight	0.4 kg	0.4 kg
Operating Temperature	-40°C to +50°C	-40°C to +50°C
Connector	Cable	Cable
IP-rating	IP69	IP69

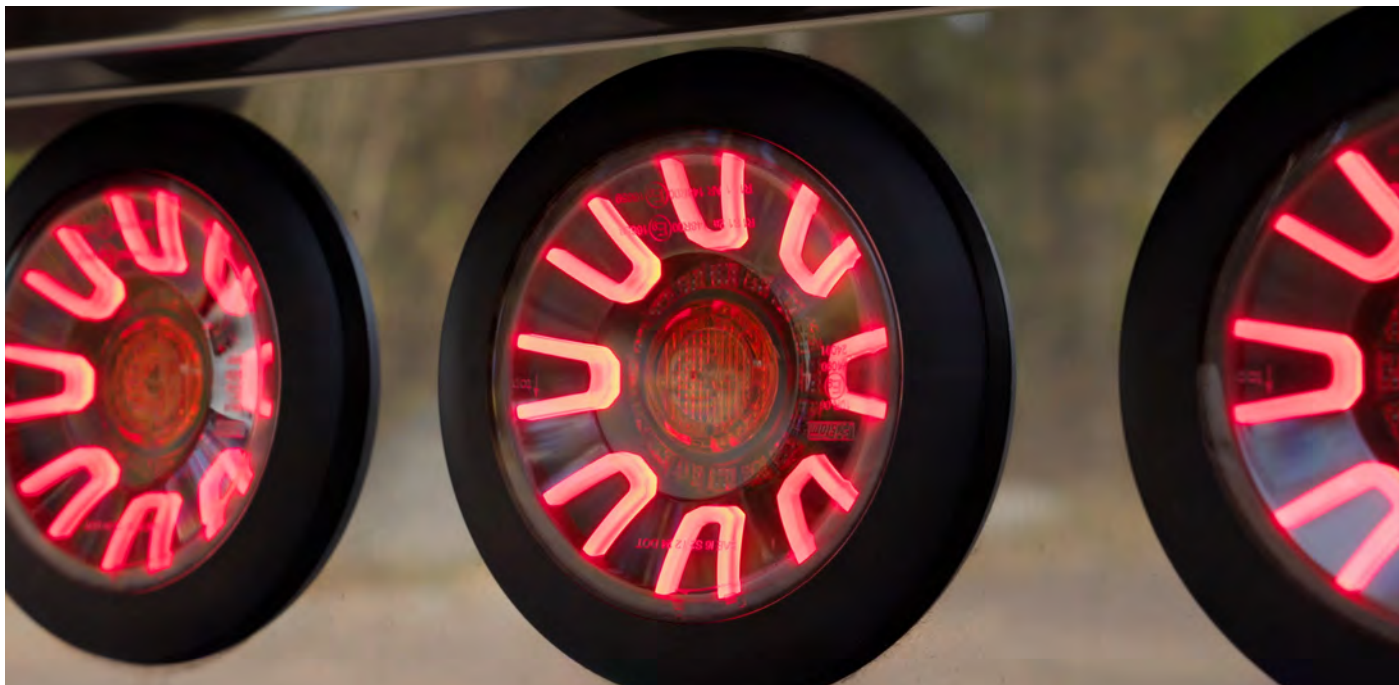

MEET SIMON LUNDMAN - A BRIOD AMBASSADOR

For Simon Lundman, trucks are more than a livelihood – they're heritage, passion, and a way to honor family history. As the owner of Lundmans Djurtransporter, Simon carries forward the company his father once built. Eleven years after taking over the business, he not only runs the daily operations but has also made a name for himself through social media, truck shows and his role in the TV-show Svenska Truckers.

Now, Simon has finished his newest project: bringing back to life the Scania Longline his father built in 1996. "It's a tribute to my dad and the truck that was the pride of our company", Simon says.

Lighting plays a central role in Simon's vision. His Oldtimer is equipped with six Olympus driving lights, mounted low on the front for a bold, old-school look. "They look great, they shine great – and they're worth every penny. Buy Olympus for your own truck – they're powerful, well-designed and you won't regret it."

Simon has been hands-on with every part of the build. Along the sides and at the rear, BriodLights position lamps stretch the full length of the truck, seamlessly integrated into the design. Where the truck once had gaps, Simon welded everything shut, ensuring the lamps fit perfectly into place.

At the back, the finishing touch comes with twelve Fristom round rear lights with black rings – six on each side. "They're really something special," Simon explains. "The black rings tie in perfectly with the rest of the truck's look."

The Scania Longline has already covered 2 680 000 km kilometers in its lifetime, but this rebuild isn't just about keeping it on the road – it's about preserving a legacy.

 **ERIK
LUNDMANS** 
HÄSTTRANSPORTER

Oldtimer

SCANDAL PLAY ON THE WAY

AMZ 753

Article. 45812 (Right) / 45822 (Left)



ONYX LED REAR LIGHT RIGHT/LEFT

Onyx is a flexible LED rear light, particularly suitable for mounting on various trailers. The rear light is an all-in-one solution with a modern design which, in addition to the basic functions of; triangle, brake, reverse and indicators, also has number plate lighting, reflex, fog and position lights. The Onyx rear light is easily mounted with a depth of only 32 mm and has a full 1.5 m cable. Available in left and right versions. ECE: R3, R4. 3 year function warranty!



E-APPROVED

Bulb Type	LED
WxHxD	240x140x32 mm
Weight	0,55 kg
Voltage	12-24 V
CC	150 mm
Cable	1,5 m
IP-rating	IP6K7
EMC	R10
Housing	Plastic



Article. 420148.3

LED LICENSE PLATE LIGHT BLACK

License plate light with 12 diodes in black ABS plastic housing, acrylic in the glass. 10-30 V. 1,7 W. CC: 53 mm. 3 year function warranty!



Article. 11501

LED REVERSE LIGHT MINI FLAT

Small flexible reverse light with a depth of only 13 mm. Despite its low profile, it has a powerful light output that is suitable for both trucks, work vehicles and passenger cars. 1,5 m ADR cable which means that the reverse light can be mounted on transport vehicles for dangerous goods. 3 year function warranty!



E-APPROVED

Bulb Type	LED
WxHxD	119x42
Voltage	10-30 V
Cable	2.5 m
Lens	PC
Operating Temperature	-40°C to +50°C

Bulb Type	LED
Diodes	4 pcs
WxHxD	101x32x13 mm
CC	90 mm
Voltage	12-24 V
Watt	12 W
Connector	Cable
Cable	1,5 m ADR
Operating Temp.	-40°C to +65°C
IP-rating	IP67





Article.

- 41910 - Yellow, indicators
- 41911 - Clear, indicators
- 41920 - Red, brake light
- 41921 - Clear, brake light
- 41930 - Red, reverse light
- 41940 - Red, fog light
- 41950 - Clear, reverse light
- 41960 - Clear, directional warning light

SQUARE REAR LIGHT 10-30 V

BridgLights Square LED rear light 10-30 V with a lens in polycarbonate with 56 diodes and a cable length of 2.5 m. Houses for 1 or 2 lamps are available, installation depth 45 mm. 132x110 mm.
3 year function warranty!

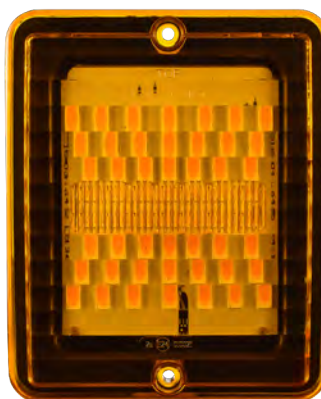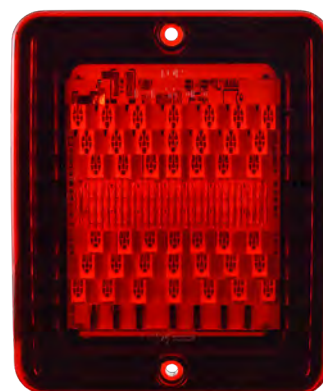

Article. 4119DV.06

SQUARE LED REAR LIGHT 24 V

BriodLights Square LED rear light for 24V with a lens in polycarbonate with 56 diodes and a cable length of 2.5 m. Houses for 1 or 2 lamps are available, installation depth 45 mm. 132x110 mm. 3 year function warranty!

Type	Rear light
Bulb type	LED
Colour	Red
Diodes	56 pcs
WxHxD	132x110 mm
Watt	3,8 W



Article. 4119.07 (single) / 4119.08 (double)

RUBBER HOUSING SINGLE/DOUBLE

Rubber housing for Briod LED inserts, available in single or double version. Accessory kit (article number 4119.12) is included when purchasing rubber housing for Briod LED inserts.



POSITION LIGHTS





Scan the qr-code to
discover all position lights



INTRODUCING BRIODLIGHTS CLASSIC

BriodLights Classic is developed for the European vehicle market, fully approved and adapted to meet today's standards. Available in multiple configurations, including the Black Edition, it delivers a clean and consistent look across your setup.

Built on a flexible and modular system, BriodLights Classic features interchangeable LED inserts and multiple mounting options, making it easy to adapt to different vehicles and needs. The result is a solution that combines versatility with a streamlined installation process. With its classic Nordic design, BriodLights Classic offers a familiar and well-balanced appearance that enhances the overall look of any vehicle.

Manufactured through a fully automated production process, every unit ensures consistent quality and high operational reliability. The upgraded OFC cable provides stable electrical performance and long-term durability, giving you a safe and dependable installation over time.





BRIOD CLASSIC LED INSERT

SUITABLE RUBBER ARMS

- 50908 - Rubber arm Y-model 60 mm
- 50910 - Rubber arm 110 mm
- 50911 - Rubber arm 195 mm
- 50925 - Cover cap



E-APPROVED



Article	Bulb type	Voltage	Power at 12 V	Power at 24 V	Color	Cable
5.50732	LED	12-30 V	0.486 W	0.964 W	Red clear glass	5 m
5.50733	LED	12-30 V	0.362 W	0.964 W	Orange clear glass	5 m
5.50734	LED	12-30 V	0.485 W	1.687 W	White opal	5 m
5.50794	LED	12-30 V	0.362 W	0.963 W	Orange	5 m
5.50794-10	LED	12-30 V	0.362 W	0.963 W	Orange	10 m
5.50795	LED	12-30 V	0.362 W	0.963 W	Orange	5 m
5.50795-10	LED	12-30 V	0.362 W	0.963 W	Orange	10 m
5.50796	LED	12-30 V	0.484 W	0.965 W	Red	5 m
5.50796-10	LED	12-30 V	0.484 W	0.965 W	Red	10 m
5.50797	LED	12-30 V	0.483 W	1.688 W	White clear glass	5 m
5.50797-10	LED	12-30 V	0.483 W	1.688 W	White clear glass	10 m
5.507971	LED	12-30 V	0.483 W	1.682 W	Cold white clear glass	5 m
5.507971-10	LED	12-30 V	0.483 W	1.682 W	Cold white	10 m



BRIOD CLASSIC LED INSERT BLACK EDITION

SUITABLE RUBBER ARMS

50908 - Rubber arm Y-model 60 mm
 50910 - Rubber arm 110 mm
 50911 - Rubber arm 195 mm
 50925 - Cover cap



E-APPROVED

Article	Bulb type	Voltage	Power at 12 V	Power at 24 V	Color	Cable
5.50794BL	LED	12-30 V	0.361 W	0.964 W	Orange - Black edition	5 m
5.50795BL	LED	12-30 V	0.362 W	0.963 W	Orange - Black edition	5 m
5.50796BL	LED	12-30 V	0.483 W	0.965 W	Red - Black edition	5 m
5.50797BL	LED	12-30 V	0.486 W	1.687 W	White - Black edition	5 m
5.507971BL	LED	12-30 V	0.486 W	1.681 W	Cold white - Black edition	5 m



BRIOD CLASSIC LED POSITION LIGHT 195 MM



E-APPROVED

Article	Bulb type	Voltage	Power at 12 V	Power at 24 V	Color	Length
5.50790	LED	12-30 V	0.362 W	0.963 W	Red/White	195 mm
5.507901	LED	12-30 V	0.362 W	0.963 W	Red/Cold white	195 mm
5.50792	LED	12-30 V	0.362 W	0.963 W	Red/Orange	195 mm
5.50793	LED	12-30 V	0.362 W	0.963 W	Orange/White	195 mm



BRIOD CLASSIC POSITION LIGHT 110/60 MM



E-APPROVED

Article	Bulb type	Voltage	Power at 12 V	Power at 24 V	Color	Length
5.50890	LED	12-30 V	0.362 W	0.963 W	Red/White	110 mm
5.508901	LED	12-30 V	0.362 W	0.963 W	Red/Cold white	110 mm
5.50891	LED	12-30 V	0.362 W	0.963 W	Orange	110 mm
5.50898	LED	12-30 V	0.362 W	0.963 W	Orange	60 mm



BRIOD CLASSIC POSITION LIGHT BLACK EDITION



E-APPROVED

Article	Bulb type	Voltage	Power at 12 V	Power at 24 V	Color	Length
5.50790BL	LED	12-30 V	0.362 W	0.963 W	Red/White - Black edition	195 mm
5.507901BL	LED	12-30 V	0.362 W	0.963 W	Red/Cold white - Black edition	195 mm
5.50890BL	LED	12-30 V	0.362 W	0.963 W	Red/White - Black edition	110 mm
5.508901BL	LED	12-30 V	0.362 W	0.963 W	Red/Cold white - Black edition	110 mm



Article. 469-0131 / 469-0132 / 469-0133 / 469-0135

LED POSITION LIGHT

Stylish and slim LED position light that is easily mounted without complicated and time-consuming recessing. White, red or orange light, clear or colored glass. Lens in impact-resistant polycarbonate. Can be supplemented with stainless steel frame (article. 469-0139). 3 year function warranty!

SOLD IN STORE PACKAGING.
BRIODLIGHTS RIDER WITH BAG.

- 5.469-0131 - Position light LED white, clear glass, 2,5m cable for store
- 5.469-0132 - Position lamp LED red, clear glass, 2,5m cable for store
- 5.469-0133 - Position lamp LED orange, clear glass, 2,5m cable for store
- 5.469-0135 - Position light LED red, 0,15 m cable for store
- 5.469-0139 - Stainless steel polished frame for 469-013X for store



Article. 18629

LED POSITION LIGHT 120 MM

This LED position light is perfectly suited for stainless steel tubes, commonly used on bars for transport vehicles and trucks. The lamp is equipped with a screw cap. It offers not only excellent light output but also impressive brightness. Red light. 3 year function warranty!

Lamp functions:

- LED position/marker light
- European E9 approval
- Electromagnetic compatibility – EMC certified
- Impact resistance – PC lens
- Reversible polarity connection
- Red light

Included with the lamp:

- Side marker light
- Rubber pad for flat mounting
- Rubber pad for mounting on tubular bars
- Screw cap

Color	Red
Bulb Type	LED
Diodes	8 pcs
Voltage	12-36 V
LxBxH	120x28x12 mm
Nominal Current at 12 V	0,1 A
Nominal Current at 24 V	0,1 A
Power at 12 V	1,2 W
Power at 24 V	2,4 W
Weight	0.064 kg
CC	94 mm
Connector	Cable 0.15 m
IP-rating	68



E-APPROVED



LED POSITION LIGHT DARK 120 MM

This LED position light from BriodLights is the perfect fit for stainless steel pipes, commonly used on bars for transport vans and trucks. Equipped with a screw cap, the lamp offers not only an exceptional light flow but also impressive brightness. 3 year function warranty!

Included with the light:

- Side marker light
- Rubber for flat mounting
- Rubber for mounting on tubular bars
- Screw cap



	Article. 18620	Article. 18621	Article. 18622
Color	White	Red	Yellow
Bulb Type	LED	LED	LED
Diodes	8 pcs	8 pcs	8 pcs
Voltage	12-36 V	12-36 V	12-36 V
LxBxH	120x28x12 mm	120x28x12 mm	120x28x12 mm
Nominal Current at 12 V	0,1 A	0,1 A	0,1 A
Nominal Current at 24 V	0,1 A	0,1 A	0,1 A
Power at 12 V	1,2 W	1,2 W	1,2 W
Power at 24 V	2,4 W	2,4 W	2,4 W
Weight	0.064 kg	0.064 kg	0.064 kg
CC	94 mm	94 mm	94 mm
Connector	Cable 0.15 m	Cable 0.15 m	Cable 0.15 m
IP-rating	68	68	68

**SOLD IN STORE PACKAGING.
BRIODLIGHTS RIDER WITH BAG.**

- 5.18620 - LED position light dark 120 mm white, for store
- 5.18621 - LED position light dark 120 mm red, for store
- 5.18622 - LED position light dark 120 mm yellow, for store





LED POSITION LIGHT DARK 84 MM

This LED position light from BriodLights is the perfect fit for stainless steel pipes, commonly used on bars for transport vans and trucks. Equipped with a screw cap, the lamp offers not only an exceptional light flow but also impressive brightness. 3 year function warranty!

Included with the light:

- Side marker light
- Rubber for flat mounting
- Rubber for mounting on tubular bars
- Screw cap



E-APPROVED

	Article. 18623	Article. 18624	Article. 18625
Color	White	Red	Yellow
Bulb Type	LED	LED	LED
Diodes	4 pcs	4 pcs	4 pcs
Voltage	12-36 V	12-36 V	12-36 V
LxBxH	84,2x27,7x12,8 mm	84,2x27,7x12,8 mm	84,2x27,7x12,8 mm
Nominal Current at 12 V	0,05 A	0,05 A	0,05 A
Nominal Current at 24 V	0,05 A	0,05 A	0,05 A
Power at 12 V	0,6 W	0,6 W	0,6 W
Power at 24 V	1,2 W	1,2 W	1,2 W
Weight	0.06 kg	0.06 kg	0.06 kg
CC	58 mm	58 mm	58 mm
Connector	Cable 0.15 m	Cable 0.15 m	Cable 0.15 m
IP-rating	68	68	68

**SOLD IN STORE PACKAGING.
BRIODLIGHTS RIDER WITH BAG.**

5.18623 - LED position light dark 80 mm white, for store
5.18624 - LED position light dark 80 mm red, for store
5.18625 - LED position light dark 80 mm yellow, for store





LED POSITION LIGHT 84 MM

This LED position light is ideally suited for stainless steel tubing, commonly used on bars for transport vans and trucks. The light comes with a screw cap and offers not only an excellent light flow but also impressive brightness. 3 year function warranty!


Included with the light:

- Side marker light
- Rubber for flat mounting
- Rubber for mounting on tubular bars
- Screw cap



E-APPROVED

	Article. 18626	Article. 18627	Article. 18625
Color	White	Red	Yellow
Bulb Type	LED	LED	LED
Diodes	4 pcs	4 pcs	4 pcs
Voltage	12-36 V	12-36 V	12-36 V
LxBxH	84,2x27,7x12,8 mm	84,2x27,7x12,8 mm	84,2x27,7x12,8 mm
Nominal Current at 12 V	0,05 A	0,05 A	0,05 A
Nominal Current at 24 V	0,05 A	0,05 A	0,05 A
Weight	0.06 kg	0.06 kg	0.06 kg
CC	58 mm	58 mm	58 mm
Connector	Cable 0.15 m	Cable 0.15 m	Cable 0.15 m
IP-rating	68	68	68

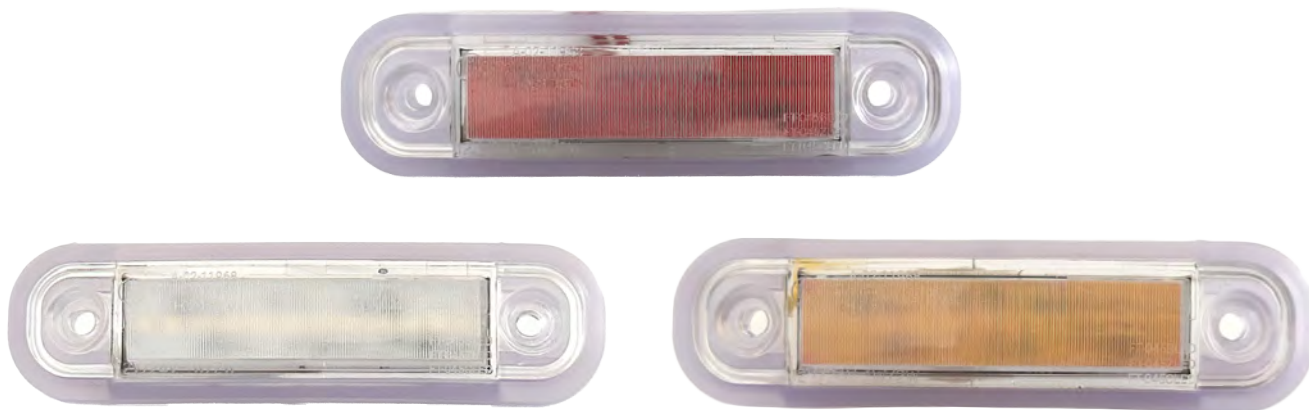

LED POSITION LIGHT 110 MM

Small and bright position light with low power consumption.

- European E9 approval (for white, red, and amber light)
- Electromagnetic compatibility – EMC certified
- Impact-resistant – PC lens
- Reverse polarity protected
- Amber light

In its standard configuration, the lights are intended for installation on flat surfaces only.



E-APPROVED

	Article. 18640	Article. 18641	Article. 18642
Color	Yellow	Red	White
Bulb Type	LED	LED	LED
Voltage	12-36 V	12-36 V	12-36 V
LxBxH	110x30,5x18 mm	110x30,5x18 mm	110x30,5x18 mm
Nominal Current at 12 V	0,08 A	0,05 A	0,05 A
Nominal Current at 24 V	0,08 A	0,05 A	0,05 A
Weight	0.06 kg	0.06 kg	0.06 kg
CC	82 mm	82 mm	82 mm
Connector	Cable 0.5 m	Cable 0.5 m	Cable 0.5 m
IP-rating	68	68	68



Article.

18631 - Angle bracket

18632 - Bracket

18633 - Bracket, ADR

18634 - Angle bracket, ADR

LED POSITION LIGHT OVAL WITH TURN SIGNAL

LED position light with turn signal and low power consumption. European homologation E9; horizontal mounting only. Electromagnetic compatibility (EMC); R10 homologation. 3 year function warranty!



E-APPROVED

Bulb Type	LED
Diodes	30 pcs
WxHxD	126x51x26 mm
CC	78 mm
Voltage	12-36 V
IP-rating	IP68
Lens	PC
Housing	Aluminium
Operating Temperature	-40°C till +50°C
Connection	Cable 0.47 m



Article.

474-105 - Orange, 0.5 m cable
 474-15010 - Orange, 10 m cable
 474-205 - Red, 0.5 m cable
 474-305 - White, 0.5 m cable
 474-150 - Orange, 5 m cable
 474-250 - Red, 5 m cable
 474-350 - White, 5 m cable

LED POSITION LIGHT 10-30 V

LED side marker light and position light with reflector and LED. 10-30 V. Orange, red or white, available with 5 m cable length. White side marker light available with 0.5 m cable. NOTE! When mounting on angle bracket, rubber seal should not be used. For other mounting, rubber seal should always be used. Angle bracket and/or rubber seal are purchased separately.

Bulb Type	LED
Diodes	5 pcs
Width	113 mm
Height	51 mm
CC	90 mm
Voltage	10-30 V
Watt	1 W

**SOLD IN STORE PACKAGING.
BRIODLIGHTS RIDER WITH BAG.**

5.474-150 - Side marker lamp LED orange 10-30 V 5 m cable for store
 5.474-15010 - Side marker lamp LED orange 10-30 V 10 m cable for store
 5.474-250 - Position light LED red 10-30V 5 m cable for store
 5.474-350 - Position light LED white 10-30V 5 m cable for store
 5.474-15010 - Side marker light LED orange 10-30V 10 m cable for store

DISPLAY STAND
INCLUDED WHEN
ORDERING 12 PCS.



Article. 17950

MULTIFUNCTIONAL HEADLAMP

BriodLights dual-mode headlamp is designed to offer a powerful combination of floodlight and torch modes to suit any situation. The 400 lumens COB floodlight casts a wide beam perfect for lighting up large areas, while the 100 lumens torch focuses on providing clarity for precise tasks. Equipped with a high color rendering index of 80, it ensures vibrant and true-to-life colors, enhancing both safety and visual clarity. 3 year function warranty!

Battery Type	Lithium-ion
Voltage	3.7 V
Floodlight (COB)	400 lm
Torch (1SMD)	100 lm
Operating Time	2.5 h (500 lm); 4 h (250 lm); 3 h (400 lm); 6 h (100 lm)
Charging Time	3 h with 5V 1A input
Charge port	USB-C
Color Rendering Index	80 CRI
Color Temperature	5700K
IP-rating	IP54/IK07
LxBxH	45x25x15 mm

DISPLAY STAND
INCLUDED WHEN
ORDERING 12 PCS.



Article. 17952

PENCIL FLASHLIGHT

A compact and versatile flashlight designed for ultimate convenience, offering both floodlight and torch modes to adapt to any situation. Its sleek, portable design makes it easy to carry and ideal for on-the-go use, no matter the task at hand. With USB-C charging, recharging is quick and hassle-free, ensuring it's always ready when you need it. Perfect for professionals who value flexibility and reliability. 3 year function warranty!

Battery Type	Lithium-ion
Voltage	3,7V 600 mAh
Front light (SMD)	150 lm
Torch (1SMD)	70 lm
Operating Time	2.5 h (front), 3.5 h (torch)
Charging Time	2.5 h with 5V 1A input
Charge port	USB-C
Color Rendering Index	80 CRI
Color Temperature	5700K
IP-rating	IP20
LxBxH	160x15x20 mm

DISPLAY STAND
INCLUDED WHEN
ORDERING 9 PCS.



Article. 17954

FOLDABLE FLASHLIGHT

This turnable flashlight offers dual light modes: a 400-lumen COB main light for wide-area illumination and an 80-lumen torch for precise, focused tasks. The 180° adjustable head offers flexibility, allowing you to direct light exactly where it's needed –perfect for tight spaces or hands-free operation. 3 year function warranty!

DISPLAY STAND
INCLUDED WHEN
ORDERING 9 PCS.



Article. 17956

FLASHLIGHT 180° TURNABLE

This compact yet powerful flashlight comes with dual light modes and a high-capacity 10,000mAh lithium-ion battery. The USB-C fast charging ensures it's ready to go in just 3 hours, keeping downtime to a minimum. With a compact 186x30x47 mm design and a 180° rotatable head, you can easily direct the light where you need it. The handy hook and magnets on the back and bottom allow you to attach the light to different surfaces for hands-free use. 3 year function warranty!

Battery Type	Lithium-ion
Voltage	3.7 V 2000mAh
Main light (COB)	400 lm
Torch (1SMD)	80 lm
Operating Time	3 h to 8 h (main light), 8 h (torch)
Charging Time	3 h with 5V 1A input
Charge port	USB-C
Color Rendering Index	80 CRI
Color Temperature	5700K
IP-rating	IP20/IK07
LxBxH	300x44x34 mm

Battery Type	Lithium-ion
Voltage	3.7 V 10000mAh
Main light (COB)	250 lm
Torch (1SMD)	70 lm
Operating Time	3.5 h (main light), 8 h (torch)
Charging Time	3 h with 5V 1A input
Charge port	USB-C
Color Rendering Index	80 CRI
Color Temperature	5700K
IP-rating	IP20/IK07
LxBxH	186x30x47 mm



FOLDABLE FLASHLIGHT
Article. 17954





THE BRIOD-FAMILY

Lights, Tech, Hardware and Accessories

BriodLights is a well-established and recognized automotive lighting brand that has been on the market since 2020. Under the Briod name, we offer a broad range of products within Hardware, Tech, and Accessories – providing complete solutions that go beyond lighting. The expansion of the Briod brand is a natural step in the company's strategy to offer a complete solution for all automotive needs. The ambition is that Briod will deliver a complete set of solutions that enhance and improve every aspect of vehicle maintenance and use.

BRIOD TECH

BriodTech consists of technical products, tailored to meet modern vehicle technology. With a focus on functionality and safety, BriodTech offers smart solutions that enhance every driving experience. The range includes carefully selected shrink joints and a range of DT connectors, among many other products, all developed to make vehicle use both easier and safer.

BRIOD HARDWARE


With Briod Hardware, we expand our product line to include everything from practical tools to automotive components, with each item designed with durability and stability in mind. Our range of lashing eyes, steering wheel knobs and repair kits are both affordable and of the highest quality and will make life easier for the professional driver.

BRIOD ACCESSORIES

Briod Accessories consists of products that complement our other product lines and enhance and facilitate every aspect of vehicle maintenance. The range includes practical microfiber cloths for various purposes, but will soon be expanded to include, for example, interior decoration and fragrance for the vehicle.



BRID LIGHTS

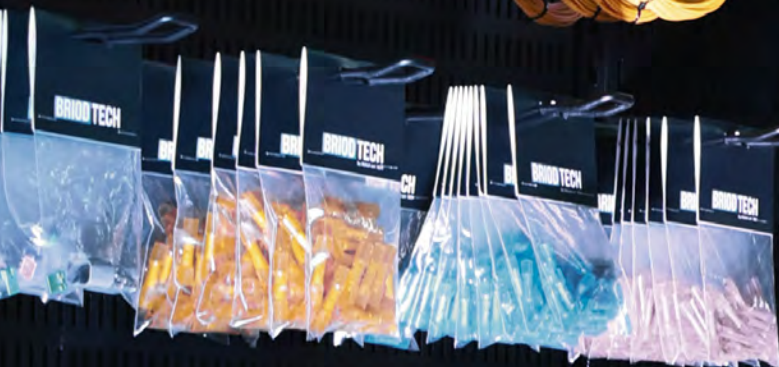

Våra färdiga paket i
butiksställ utformade för att maximera exponeringen för fordonsbelysning i förpackningar. Naturligtvis även ett brett sortiment av sålda produkter i snygga förpackningar som färdigt från

Med vår butiksinredning erbjuder du en organiserad, inbjudande och säljande miljö som inte bara förhöjer upplevelsen utan även underlättar konverteringen. Låt oss hjälpa dig att lyfta din butik till nästa nivå.

Läs mer i vår
butiksbroschyr



BRIODTECH



Article. 5.0289.03

PLUG 3-PIN

Plug with 3 pins (1+2 larger). DIN9680 form B. Supplied with plastic protection cap. Fits 0289.02 and 0289.04. Available on John Deere and Valmet. Protection class IP54. 2 x 25 A + 1 x 5 A. Sold in store packaging 1 pc. Briod Tech rider with bag.



Article. 5.0820.03

PLUG 7-PIN

7-pin plug with plastic rubber seal. Screw connection. DIN ISO 1724. Sold in store packaging 1 pc. Briod Tech rider with bag.



Article. 5.2677.11

EBS PLUG 7-PIN

7-pin EBS plug. Supplied complete with 2x6.0 mm² + 5x 1.5 mm² sleeves. Color coded for easier assembly. ADR approved. Screw connection. Briod Tech rider with bag.



Article. 5.2679.03

PLUG 13-PIN

12 V. Made of impact-resistant plastic. 13-pin. With bayonet connector (13 pins). Supplied with screw-on connectors. ISO No. 11446. Briod Tech rider with bag.



Article. 5.2675.11

PLUG 15-PIN

15-pole with trumpet connection. DIN/ISO 12098. 15 ferrules, 12 pcs 1.5 mm² and 3 pcs 2.5 mm². Supplied with pin for crimping/soldering or screw connection. ADR approved. Supplied with bag and rider for store.



Article. 5.0289.04

SOCKET 3-PIN

3-pole socket outlet (1+2 larger) sockets. DIN 9680. Supplied with rubber seal. 2 fixing holes. Available on Valmet. CC: 45 mm. Protection class IP54. 2 x 25 A + 1 x 5 A load. The pin housing/box is 25 mm in diameter. Sold in store packaging 1 pc. Briod Tech rider with bag.



Article. 5.0820.02

SOCKET 7-PIN

Plastic 7-pole for screw connection. 12 V. DIN ISO 1724. 3 fixing holes. Socket diameter 70 mm. Socket (3 pins, 4 sockets). Briod Tech rider with bag.



Article. 5.2678.11

EBS SOCKET 7-PIN

EBS box, 7-pin. Supplied complete with 2x6.0 mm² + 5x1.5 mm² pins. ADR approved. Screw connection. Briod Tech rider with bag.



Article. 5.2679.02

SOCKET 13-PIN

Socket 13-pin, 12-24 V for store. Briod Tech rider with bag.



Article. 5.2676.11

SOCKET 15-PIN

15-pin socket outlet with PG16 connection, pins included. DIN/ISO 12098. 15 pins, 12 pcs 1.5 mm² and 3 pcs 2.5 mm². ADR approved. Briod Tech rider with bag.



Article. 19880

SWITCH PANEL 6 FUNCTIONS

The ultimate solution to customize your lighting experience. This panel with 6 functions allows you to design your own control panel with 24 versatile stickers, tailored to meet your needs. The BriodTech Switch Panel simplifies your light switching process and makes it more intuitive and user-friendly than ever before.

Voltage	12-24V
Watt	720 W
Nominal Current at 12 V	20 A
Nominal Current at 24 V	10 A
IP-rating	67
Operating Temp.	-40°C to +105°C
Height	67 mm

An extension cable 3.2 m is available for extended reach and easy installation.

Article. 19882





Article. 19881

SWITCH PANEL 4 FUNCTIONS

The ultimate solution to customize your lighting experience. This panel with 4 functions allows you to design your own control panel with 55 versatile stickers, tailored to meet your needs. The BriodTech Switch Panel simplifies your light switching process and makes it more intuitive and user-friendly than ever before.

Voltage	12-24V DC
Max input current	40 A
Nominal Current at 8 bit	60 A
Nominal Current at 12 bit	80 A
IP-rating	IP68
Operating Temp.	-40°C to +85°C
WxHxD	300x190x95 mm

An extension cable 3.2 m is available for extended reach and easy installation.

Article. 19883





MAGNETIC CABLE HOLDER

Briod Tech cable holder is designed to securely organize and hold cables, wires, LED strips, pipes, and similar items in place, making it ideal for damage-free installation in a variety of environments. They are commonly used in industries such as construction, automotive, manufacturing, and electrical installations, as well as for general organization in warehouses or workshops. They are easy to attach and remove from ferrous surfaces, allowing for hassle-free repositioning and adjustments without leaving marks or causing damage to cables or surfaces, and their weather-resistant design supports both indoor and outdoor applications.

A cable holder magnet that attaches to metal surfaces with a strong magnet makes it very easy to secure cables with cable ties—such as wiring harnesses, work light installations, and driving lights—in a neat and controlled manner. It can also be used, for example, to attach LED strips to scaffolding and other cable runs. The holder has a diameter of 31 mm, and the maximum width of cable ties that fit is 9 mm.

Available for store displays with 4 pcs.

Article. 5.615100



Article. 271-97172099 (incl. pliers) / 271-971720 (excl. pliers)

DT ASSORTMENT BOX

Assortment box with Deutsch connectors 2–3-pin. The box contains 18 articles approx. 300 parts. The crimping tool is a ratchet pliers with a built-in backstop that ensures that the crimping is completed.

The following items are included in the box:

- 271-9101 DT connector pin 0.5–1.5 mm²
- 271-9102 DT contact pin 1.3–2.1 mm²
- 271-9098 DT contact sleeve 0.5–1.5 mm²
- 271-9099 DT contact sleeve 1.3–2.1 mm²
- 271-9082 DT 2-pole male connector housing
- 271-9081 DT 2-pole long male connector housing
- 271-9071 DT 3-pole male connector housing without collar
- 271-9076 DT 3-pole male connector housing with collar
- 271-9092 DT 2-pole female connector housing
- 271-9091 DT 2-pole long female connector housing
- 271-9072 DT 3-pole female socket without collar
- 271-9075 DT 3-pole female socket with collar
- 271-9110 Rubber seal for 2-pole DT connector
- 271-9111 Rubber seal for 3 or 4 pole DT connector
- 271-9083 DT 2-pole male contact locking device
- 271-9093 DT 2-pole contact locking female
- 271-9074 DT 3-pole contact locking male
- 271-9073 DT 3-pole contact locking female

SHRINK TUBE

BriodTech double-walled shrink tubing in a practical mini box, available with and without glue. Made of flame-retardant polyolefin and designed for easy handling and storage. Ideal for workshops and electrical installations where reliable insulation and protection are required.

- Shrinkage factor: 3:1
- Shrink temperature: 110°C
- Working temperature: -55°C to 125°C
- Breakdown voltage: >20 KV
- Approvals: UL224, MIL, RoHS



	Article. 280003	Article. 280006	Article. 280009	Article. 280012	Article. 280019	Article. 280024	Article. 280103	Article. 280106	Article. 280109	Article. 280112	Article. 280119	Article. 280124
Glue	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No
Working Length	5 m	3,5 m	3 m	2,5 m	2 m	1,5 m	5 m	4 m	3 m	3 m	2 m	2 m
Color	Black	Black	Black	Black	Black	Black	Black	Black	Black	Black	Black	Black
Diameter	3 mm	6 mm	9 mm	12 mm	19 mm	24 mm	3 mm	6 mm	9 mm	12 mm	19 mm	24 mm
Diameter after shrinking	1 mm	2 mm	3 mm	4 mm	6 mm	8 mm	1 mm	2 mm	3 mm	4 mm	6 mm	8 mm

Article.2051A.04

JUNCTION BOX 12-HOLE WITHOUT VENT

BriodTech black plastic junction box. Size 206 x 154 mm. Height 71 mm. Protection class IP54. ADR approved.





For store displays – add the custom stand designed for BriodTech Shrink Tubes.

Article. 280000



Article. 2051.91 (8 mm hole) / 2051.92 (5 mm hole)

COUPLING RINGS FOR JUNCTION BOX

BriodTech coupling rings for junction box 2051A.04.





BRIODTECH DURASEAL SHRINK SLEEVE

Shrink joint with internal glue, clamped together and then heated with a hot air gun. The stripped cable ends are threaded into the sleeve and pressed and then heated until the hot melt glue flows out at the edge. This provides an excellent seal against moisture etc.

- Material: Tin-plated copper
- Insulation: Polyamide (PA) nylon with internal glue
- Shrinkage temperature: 120° C
- Temperature range: -55° C to +125° C
- Shrink ratio: 3:1
- Halogen free
- Transparent insulation which means that visual control can be done after shrinkage.



**SOLD IN STORE PACKAGING
WITH 25 PCS. BRIODTECH
RIDER WITH BAG.**

Article: 5.1777, 5.1778, 5.1779

Article	Name	Color
1777	Shrink sleeve BriodTech DuraSeal red 0,5-1,0 mm ² 100 pcs/pack	Red
1778	Shrink sleeve BriodTech DuraSeal blue 1,5-2,5 mm ² 100 pcs/pack	Blue
1779	Shrink splice BriodTech DuraSeal yellow 3,0-6,0 mm ² 50 pcs/pack	Yellow

BRIOD TECH

PREMIUM SELECTION

Krympskarv DuraSeal röd 0,5-1,0 mm²

Art.nr: 1777
Antal: 100 st.

BRIOD TECH

PREMIUM SELECTION

Krympskarv DuraSeal blå 1,5-2,5 mm²

Art.nr: 1778
Antal: 100 st.

BRIOD TECH

PREMIUM SELECTION

Krympskarv DuraSeal gul 3,0-6,0 mm²

Art.nr: 1779
Antal: 50 st.

BRIOD TECH

PREMIUM SELECTION

Krympskarv DuraSeal röd 0,5-1,0 mm²

Art.nr: 1777
Antal: 100 st.

BRIOD TECH

PREMIUM SELECTION

Krympskarv DuraSeal blå 1,5-2,5 mm²

Art.nr: 1778
Antal: 100 st.

BRIOD TECH

PREMIUM SELECTION

Krympskarv DuraSeal gul 3,0-6,0 mm²

Art.nr: 1779
Antal: 50 st.



CABLE RKUB 1X0,75 MM² 70°C - 10 M

Article	Name
5.1401A.01	1 x 0,75 mm ² , black RKUB 10m. for store
5.1401A.02	1 x 0,75 mm ² , red RKUB 10m. for store
5.1401A.03	1 x 0,75 mm ² , white RKUB 10m. for store
5.1401A.04	1 x 0,75 mm ² , green RKUB 10m. for store
5.1401A.05	1 x 0,75 mm ² , yellow RKUB 10m. for store
5.1401A.06	1 x 0,75 mm ² , blue RKUB 10m. for store
5.1401A.07	1 x 0,75 mm ² , brown RKUB 10m. for store
5.1401A.08	1 x 0,75 mm ² , gray RKUB 10m. for store
5.1401A.09	1 x 0,75 mm ² , purple RKUB 10m. for store
5.1401A.29	1 x 0,75 mm ² , brown/white RKUB 10m. for store



BKUB CABLE 1X1,5 MM² 70°C - 10 M

Article	Name
5.1401C.01	1 x 1.5 mm ² , black BKUB 10m. for store
5.1401C.02	1 x 1.5 mm ² , red BKUB 10m. for store
5.1401C.03	1 x 1.5 mm ² , blue BKUB 10m. for store
5.1401C.04	1 x 1.5 mm ² , yellow BKUB 10m. for store
5.1401C.05	1 x 1.5 mm ² , gray BKUB 10m. for store
5.1401C.06	1 x 1.5 mm ² , brown BKUB 10m. for store
5.1401C.07	1 x 1.5 mm ² , green BKUB 10m. for store
5.1401C.08	1 x 1.5 mm ² , white BKUB 10m. for store



RKUB CABLE 1X2,5 MM² 70°C - 10 M

Article

5.1401E.01
5.1401E.02
5.1401E.03
5.1401E.04
5.1401E.05
5.1401E.06
5.1401E.07
5.1401E.08

Name

1 x 2,5 mm², black RKUB 10m. for store
1 x 2,5 mm², red RKUB 10m. for store
1 x 2,5 mm², blue RKUB 10m. for store
1 x 2,5 mm², yellow RKUB 10m. for store
1 x 2,5 mm², gray RKUB 10m. for store
1 x 2,5 mm², green RKUB 10m. for store
1 x 2,5 mm², brown RKUB 10m. for store
1 x 2,5 mm², white RKUB 10m. for store



RKUB CABLE 1X4 MM² 70°C - 10 M

Article

5.1401G.01
5.1401G.02
5.1401G.03
5.1401G.04

Name

1 x 4 mm², black RKUB 10m. for store
1 x 4 mm², red RKUB 10m. for store
1 x 4 mm², white RKUB 10m. for store
1 x 4 mm², brown RKUB 10m. for store





ASSORTMENT BOX DT CONNECTORS 2-6-POLE

Assortment box DT connectors, 2-6-pole. Available in two versions, one with clamping sleeves/clamping pins and the other with press sleeves/press pins.




Article	Name
271-971738	BriodTech Assortment DT connectors 2-6-pole (clamp + press)
271-971736	BriodTech Assortment DT connectors 2-6-pole (clamp)
271-971737	BriodTech Assortment DT connectors 2-6-pole (clamp)

PRE-ASSEMBLED ADR WIRING HARNESSES FOR 2-PIN DT

Pre-assembled ADR cable harnesses with mounted 2-pole Deutsch connector type DT-2S-E008 with rubber seal (1755.134) at the cable entry. Available in lengths from 0.5 m - 10 m.

Article	Name
5.271-9050	Cable with DT connector 0.5 m 2-pin female ADR 1 mm ² for store
5.271-9057	Cable with DT connector 1 m 2-pin female ADR 1 mm ² for store
5.271-9053	Cable with DT connector 3 m 2-pin female ADR 1 mm ² for store
5.271-9051	Cable with DT connector 5 m 2-pin female ADR 1 mm ² for store
5.271-9052	Cable with DT connector 10 m 2-pin female ADR 1 mm ² for store

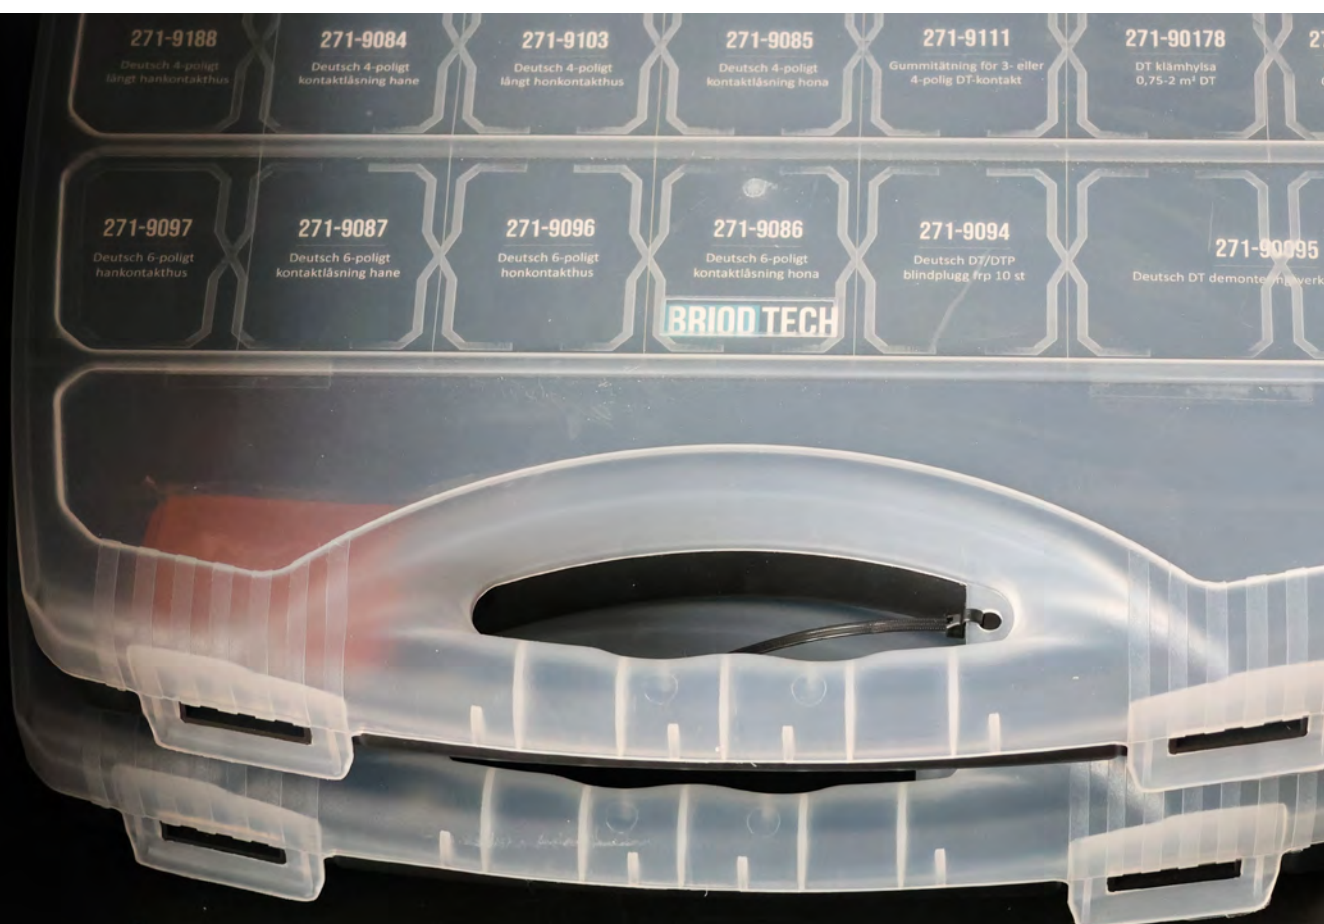

BRIOD HARDWARE



REPAIR KIT RAUFOSS

Briod Hardware Repair Kit with compressed air couplings from the well-known brand Raufoss. We can now offer a repair kit containing selected couplings from Raufoss, allowing the operator to easily repair damage or other minor issues with the connections. Handy when the driver is out on the road or in the field and professional repair or maintenance is out of reach to fix the damage. Tools are also included in this kit for best results.

These products are included:

- 1 pc 2600.01 Pipe cutter
- 2 pcs R90506006 Coupler 6x1.0–6x1.0 mm straight, ABC
- 2 pcs R90508008 Coupler 8x1.0–8x1.0 mm straight, ABC
- 2 pcs R90510210 Coupler 10x1.5–10x1.5 mm straight, ABC
- 2 pcs R90512012 Coupling 12x1.5–12x1.5 mm straight, ABC
- 2 pcs 1852 ABA tool, socket chisel 25 cm
- 2 pcs 97121409 Hose coupling socket 10.5 mm–10.5 mm
- 4 pcs 1851.03 ABA clamps 13–20 mm

REPAIR KIT CAMOZZI

Briod Hardware Premium Selection is proud to offer TRUCK-DCASE kits from well-known CAMOZZI to allow the driver to repair pipe damage or other small problems on the connections when the driver is on the road or in the field if professional repair or maintenance is out of reach.

NOTE: The 6000 brackets are for use in driving applications only (no air brake, no suspension, no driveline).

These products are included:

- 1x 658004 Straight Coupling 4 mm Metal
- 1x 658005 Straight Coupling 5 mm Metal
- 1x 658006 Straight Coupling 6 mm Metal
- 1x 658008 Straight Coupling 8 mm Metal
- 2x 658010 Straight Coupling 10 mm Metal
- 1x 658012 Straight Coupling 12 mm Metal
- 1x 658014 Straight Coupling 14 mm Metal
- 2x 65958006 Straight Coupling 6x1 mm
- 2x 65958008 Straight Coupling 8x1 mm
- 1x 65958010 Straight Coupling 10x1.5 mm
- 1x 65958012 Straight Coupling 12x1.5 mm
- 1x 6590006 Hose Wrench 6
- 1x 6590008 Hose Wrench 8
- 1x 65900010 Hose Wrench 10
- 1x 65900012 Hose Wrench 12
- 1x 2600.01 Pipe Cutter



STRAPS

This all-purpose strap from Briod Hardware is designed for reliability and ease of use. Equipped with a robust cam buckle made of solid zinc, it ensures a firm and secure hold for a wide range of applications – whether you’re securing cargo, bundling materials, or organizing equipment. Built to perform in demanding conditions, this strap is a dependable choice for both professional and everyday use.

Now also available in 2-pack for store display:

Article. 5.38101 / 5.38102 / 5.38103 / 5.38104 / 5.38105 / 5.38106 / 5.38107 / 5.38108

Article	Name
38101	Strap 25 mm, 0,5 m Black LC: 125 daN
38102	Strap 25 mm, 1,0 m Red LC: 125 daN
38103	Strap 25 mm, 1,5 m Black LC: 125 daN
38104	Strap 25 mm, 2,0 m Orange LC: 125 daN
38105	Strap 25 mm, 2,5 m Yellow LC: 125 daN
38106	Strap 25 mm, 3,0 m Blue LC: 125 daN
38107	Strap 25 mm, 3,5 m Black LC: 125 daN
38108	Strap 25 mm, 5,0 m Black LC: 125 daN

For store displays – get the assortment box including 32 pcs of straps – organized and ready to showcase.

Article. 38100

These products are included in the box:

- Article. 38102 – Red strap 25 mm (8 pcs)
- Article. 38104 – Orange strap 25 mm (8 pcs)
- Article. 38106 – Blue strap 25 mm (8 pcs)
- Article. 38108 – Black strap 25 mm (8 pcs)





Article	Name
38120	Strap 25 mm with double hook, 4,7+0,3 m, LC: 400 daN
38130	Strap 35 mm with double hook, 5,6+0,4 m, LC: 1000 daN
38150	Strap 50 mm with double hook, 9,6+0,4 m, LC: 2000 daN
38151	Strap 50 mm with double hook, 9,6+0,4 m, LC: 2500 daN
38152	Strap 50 mm ERGO double hook, 9,6+0,4 m, LC: 2000 daN
38153	Strap ETF 50 mm with ratchet, 3,0+1,0 m, LC: 1000 daN
38154	Wheel lashing 35 mm with double hook/ring, 3,0+1,0m, LC: 1500 daN





Article. 5.8502935

CLEANING GUN WITH SPIRAL

Briod Hardware cleaning gun for connection to newer vehicles' 6 mm air hose system to the chair. 4 m long spiral hose that is also equipped with an air coupling that makes the gun and spiral hose easy to disconnect to be stored elsewhere e.g. the toolbox when not in use. 6 mm T-coupling included. Packed in Briod Hardware rider for store.



Article. 79401

LASHING EYE

BriodHardware Lashing loop with covered bottom in aluminum, loop in steel. The lashing eye is tensile tested according to the instructions TSVFS 1978:9, and resists a tensile force of at least 20,000 N (2000 kp). The outer diameter of the bowl is 92 mm, height 23 mm. Incl. Allen bolt 42x12 mm.



WHEEL NUT SLEEVES

Wheel nut sleeves in polished stainless steel or chromed plastic. Available in 2 sizes.

Height (mm)
Inside (mm)

Article.
74015632

50
32

Article.
74015695

51
33

Article.
740404800

52
34



Article. 0302

STEERING WHEEL KNOB

Steering wheel knob with split bracket
for steering wheel diameter up to 35 mm.
Height: 55 mm.



Article. 5.0303

STEERING WHEEL KNOB

This stylish luxury steering wheel spinner fits
securely on all steering wheels with a diameter of
up to 31.7 mm. Ideal for trucks, tractors and larger
agricultural vehicles, but also for lawn mowers and
garden machinery. Height: 105 mm, length: 50 mm,
width: 75 mm. Weight: 0.33 kg.



CABLE ENTRIES

Seals and locks, made of black UV-resistant
Chloroprene. All sizes are designed for 1-4 mm
material thickness in the grommet hole.

Article	Name
0149A	Cable entry 3-5 mm black chloroprene
0139A	Cable entry 5-7 mm black chloroprene
0140A	Cable entry 7-10 mm black chloroprene
0141A	Cable entry 10-14 mm black chloroprene
0142A	Cable entry 14-20 mm black chloroprene
0143A	Cable entry 20-26 mm black chloroprene

BRIOD ACCESSORIES



SPIN ACCESSORIES



Article. 5.50102

MICROFIBER TERRY CLOTH

Microfiber terry cloth Premium Line. Size: 90x60 cm.
Excellent for car painted surfaces. 1 piece/pack.

Article. 5.50101

MICROFIBER CLOTH GLASS

Microfiber cloth for use on glass
surfaces. Size: 40x40 cm. 1 piece/pack.



Article. 5.50105

MICROFIBER CLOTH ALLROUND

Microfiber cloths allround in blue and
yellow color. Size: 40x40 cm. 2 pcs/pack.

TRUCK TABLES FOR SCANIA

Stylish and functional, these truck tables provides a large storage area for your needs. The table legs exactly reproduce the contour of the panel surface, so the table is extremely stable and the 7 mm high edge with anti-slip mat ensures that your computer, iPad or mobile remains safe throughout the journey. All tables are equipped with an anti-slip rubber mat.

Mounting

Using the Velcro, the tables can be easily attached to the panel, so that the surface of the panel is not damaged during installation and further use. All assembly materials and instructions are included.

FOR SCANIA



Article. 50114

TRUCK TABLE R&S NG 2016/2021-

Length	1320 mm
Width	430 mm
Height	60 mm

FOR SCANIA



Article. 50115

TRUCK TABLE R&S NG 2016/2021-

Length	610 mm
Width	490 mm
Height	70 mm



Article. 50116

TRUCK TABLE R&S NG 2016/2021-

Length	770 mm
Width	510 mm
Height	70 mm

TRUCK TABLES FOR VOLVO

Stylish and functional, these truck tables provides a large storage area for your needs. The table legs exactly reproduce the contour of the panel surface, so the table is extremely stable and the 7 mm high edge with anti-slip mat ensures that your computer, iPad or mobile remains safe throughout the journey. All tables are equipped with an anti-slip rubber mat.

Mounting

Using the Velcro, the tables can be easily attached to the panel, so that the surface of the panel is not damaged during installation and further use. All assembly materials and instructions are included.



Article. 50110

TRUCK TABLE FH5 MAXI 2021-

Length	1270 mm
Width	390 mm
Height	70 mm



Article. 50117

TRUCK TABLE FH5 MIDDLE 2021-

Length	735 mm
Width	575 mm
Height	70 mm



Article. 50111

TRUCK TABLE FH4 MAXI 2013-2020

Length	1260 mm
Width	390 mm
Height	70 mm



Article. 50112

TRUCK TABLE FM MAXI 2021-

Length	1440 mm
Width	490 mm
Height	60 mm



Article. 50113

TRUCK TABLE FM MIDDLE 2021-

Length	960 mm
Width	510 mm
Height	57 mm



Article. 50200

COFFEE MAKER WITH HOLDER

Treat yourself to the luxury of enjoying freshly brewed coffee wherever you are. With our Briod Accessories coffee maker, a steaming cup of coffee is just a button press away. Perfect for those who spend a lot of time behind the wheel. The brewer comes with a handy holder to keep your coffee safe while driving - the best way to stay alert and focused during long trips!

- Material: PP
- Capacity: 0,65 L
- Power: 300 W
- Coffee maker with 4-6 cups
- Anti-drip
- Filter holder
- Permanent filter with handle
- Automatically kept warm with non-stick coated heating plate
- Overheat protection with thermostat and thermal fuse
- 'MAX' and 'MIN' water level marks inside the water tank
- High temperature resistant glass



Article. 50120

RECYCLED CLEANING RAGS 10 KG

Briod Accessories offers versatile and sustainable cleaning rags made from recycled textiles. These medium-weight, soft cloths are perfect for cleaning, polishing, and absorbing liquids, making them a popular choice in the automotive industry and beyond. Ideal for workshops focused on car care, waxing, maintenance, engineering, and transportation, they deliver reliable performance across various applications.

Each year, over 4,000 tons of textiles are saved from landfills and incineration through our dedicated recycling process. Discarded clothes, sheets, bedding, terry cloth, and other textiles are collected, washed, dried, and cut into practical sizes. The rags are then sorted by texture and type to ensure maximum efficiency for multiple uses, offering a sustainable solution without compromising on quality.



100%
RECYCLED



SUSTAINABLE
MANUFACTURER



Article. 50125

RECYCLED LINT- FREE CLEANING RAGS 10 KG

Briod Accessories lint-free white cleaning rags are made from 100% recycled cotton, sourced from high-quality textiles like duvets, sheets and pillowcases. The material is carefully sorted and cut into practical sizes, creating soft, durable cloths that are ideal for cleaning, polishing, staining and absorbing in environments where a flawless finish is essential.

Thanks to their pre-washed fibers, these rags offer exceptional absorbency—holding more than 20 times their weight—while maintaining high tensile strength even when wet. Their softness makes them perfect for reaching into tight or delicate spaces without leaving lint or residue. Suitable for demanding applications in automation, shipbuilding, powder coating, printing, machining and surface treatment.



100%
RECYCLED



SUSTAINABLE
MANUFACTURER



100%
NATURAL COTTON



WE MAKE YOUR STORE LOOK GOOD

We offer a flexible store furnishing system that allows you to assemble store fittings according to your specific needs. Whether you want to piece together furnishings that suit you personally, or if you prefer our ready-made packagesolutions, wehavesomethingthatfitsyourstore.

Our ready-made package solutions include display stands for effective showcasing of vehicle lighting and retail packaging, making it easy for you to present your products in the best way possible. Additionally, we offer a wide range of easy-to-sell products packaged in attractive retail boxes ready to be sold straight from the shelf.

With our store furnishings, you can create a welcoming and organized store environment that not only attracts customers but also enhances their shopping experience. Let us help you take your store to the next level!

Briod products are available in practical retail packaging that can be easily and attractively displayed in stores. For the convenience of our retailers, there is also the option of store racks that make it easy to present the products in an attractive way. For customers who are not involved in retail, the Briod range is of course also available without retail packaging and in some cases also in larger volumes, adapted to their needs.



STYLISH BRIOD RIDERS

Our pinpack products have black riders with the logo of our own brands BriodLights, BriodTech, Briod Hardware and Briod Accessories. The range consists of easy-to-sell products that enhance and enhance every aspect of vehicle maintenance and use of vehicles.

TOP SIGNS FOR A COMPLETE LOOK

Enhance your store's visual appeal and product display with Briod top signs, designed to fit seamlessly into any retail environment. Available in various lengths, these signs can align with both our wall and floor fixtures, ensuring a cohesive and inviting appearance.



Discover all products available in store packaging at abkati.se

VEHICLE LIGHTING ACCESSORIES



Article. 15848

LICENSE PLATE BRACKET FOR 22" LED BAR

Driving light bracket for 1 x 22" LED bar (560 mm). Suitable for article. 15237 and 275-53340. Mounted behind the license plate. Hole pattern: 8 x 17 mm on the two side holes. Black powder-coated steel bracket.



Article. 88801

UNIVERSAL BRACKET FOR LED BAR

Universal crash bar bracket for mounting a light bar. Fits most passenger cars and light commercial vehicles. Sold in pairs and supplied with 8 x M6x120 mm bolts, washers, lock washers, and nuts.



Article. 88922

TWO-PIECE DRIVING LIGHT BRACKET FOR LED BARS

This two-piece bracket is designed for LED light bars and allows adjustable spacing, ensuring a secure and stable installation. It is intended for discreet mounting behind the license plate. Powder-coated in black (RAL 9005).



Article. 275-63006

LICENSE PLATE BRACKET FOR EDGE 23" LED BAR

License plate bracket for the Edge 23" light bar from BridgLight, mounted behind the license plate. Option to position the light bar above or below the plate. Also available in a kit with Canm8 Canbus Universal (article. 275-630002).



Article. 112020

DRIVING LIGHT BRACKET FOR LED BAR

Driving light bracket for LED bar. Fits all light bars with back brackets. Mounted behind the license plate. Hole spacing: min 370 mm, max 575 mm.



Article. 15914

DRIVING LIGHT BRACKET FOR 4X 9" LIGHTS

Driving light bracket for 4 x 9" lights. Mounted behind the license plate. Hole patterns: 31 x 10 mm on the four vertical plates with 240 mm center distance, and 57 x 8 mm and 95 x 8 mm on the horizontal holes with 100 mm center distance.



Article. 15915

DRIVING LIGHT BRACKET FOR 4X 7" LIGHTS

Driving light bracket for 4 x 7" lights. Mounted behind the license plate. Hole patterns: 25 x 10 mm on the four vertical plates with 180 mm center distance, and 172 x 8 mm on the horizontal holes with 275 mm center distance.



Article. 15918

ANGLE BRACKET FOR BRIODLIGHTS EDGE 9"

Angle bracket for BriodLights Edge 9". Mount the bracket in the desired position, then attach the light bar.



Article. 112012

DRIVING LIGHT MOUNT FOR 2X LIGHTS

Black holders for driving lights. Mounted behind the license plate. Available for two lights.



Article. 112013

DRIVING LIGHT MOUNT FOR 3X LIGHTS

Black holders for driving lights. Mounted behind the license plate. Available for three lights.



Article. 15843 (for 9") / 15844 (for 7")

DRIVING LIGHT MOUNTS FOR 7" AND 9" LIGHTS

Mount for 2 pcs driving lights. Specially designed to work with 360-degree cameras, adaptive cruise control systems, and similar devices mounted in the center of the car's grille. Easily installed behind the license plate. Extra-reinforced metal plate. Black mount.





Article. 25950

DRIVING LIGHT HD FRONT BAR BRACKET

Mounts for driving lights on the snowmobile. (NOTE: Lights not included.) Can be mounted on the HD front bar. (with 2 holes on each side) Lights sold separately (item no. 11150). Available as a kit including mount and light (article. 25951).



Article. D408422

STABILIZER BRACKETS FOR 2X DRIVING LIGHTS

Adjustable mount for secure installation of driving lights. 2-pack in a bag with clips. Clamping range: 150–250 mm.



Article. D408412

STABILIZER BRACKETS FOR 2X DRIVING LIGHTS

Round driving light support brackets, available in black powder-coated. Length: 200–230 mm. 2-pack. Also available in stainless steel (article. D408412R).





DT 2-PIN FEMALE CONNECTOR

271-9194	DT 2-pin connector, female, complete kit
271-9093	DT 2-pin connector, female, 10-pack
5.271-9194	DT 2-pin connector, female, complete kit for store
271-9092	DT 2-pin, female, 10-pack
271-9099	DT contact pins 1,3-2,1 mm ² 10-pack
271-9098	DT contact pins 0,5-1,5 mm ² 10-pack
271-90094	DT 2-pin dust cap for 271-9092



DT 2-PIN LONG FEMALE CONNECTOR

271-9195	DT 2-pin long female connector, complete
271-9091	DT 2-pin long connector, female, 10-pack
271-9098	DT contact pins 0,5-1,5 mm ² 10-pack
271-9099	DT contact pins 1,3-2,1 mm ² 10-pack
271-9093	DT 2-pin female wedge lock, 10-pack



DTP 2-PIN LONG FEMALE CONNECTOR

271-90184	DTP 2-pin connector, female
271-90185	DTP 2-pin wedge lock, female
271-90188	DTP contact pin 2-3 mm ²



DT 3-PIN FEMALE CONNECTOR

271-9184	DT 3-pin connector, female, complete kit
5.271-9184	DT 3-pin connector, female, complete kit for store
271-9072	DT 3-pin connector, female, without flange
271-9073	DT 3-pin wedge lock, female
271-9075	DT 3-pin connector, female, with flange
271-9076	DT 3-pin connector, female, with flange



DT 4-PIN FEMALE CONNECTOR

271-9190	DT 4-pin connector, female, complete kit
271-9085	DT 4-pin wedge lock, female
271-9099	DT contact pins 1,3-2,1 mm ² 10-pack
5.271-9190	DT 4-pin connector, female, complete kit for store
271-9088	DT 4-pin connector, female
271-9098	DT contact pins 0,5-1,5 mm ² 10-pack
271-90092	DT 4-pin dust cap for 271-9088



DT 4-PIN LONG FEMALE CONNECTOR

271-9199	DT 4-pin long connector, male, complete kit
5.271-9199	DT 4-pin long connector, male, complete kit for store
271-9103	DT 4-pin long connector, female
271-9085	DT 4-pin wedge lock, female
271-9099	DT contact pins 1,3-2,1 mm ² 10-pack
271-9098	DT contact pins 0,5-1,5 mm ² 10-pack

DT 6-PIN FEMALE CONNECTOR

271-9196	DT 6-pin connector, female, complete kit
271-9096	DT 6-pin connector, female, 10-pack
5.271-9196	DT 6-pin connector, female, complete kit for store
271-9086	DT 6-pin wedge lock, female, 10-pack
271-9098	DT contact pins 0,5-1,5 mm ² 10-pack
271-9099	DT contact pins 1,3-2,1 mm ² 10-pack

DT 8-PIN FEMALE CONNECTOR

271-9185	DT 8-pin connector, female, complete kit
271-9098	DT contact pins 0,5-1,5 mm ² 10-pack
271-9099	DT contact pins 1,3-2,1 mm ² 10-pack
271-9104	DT 8-pin connector, female
271-9107	DT 8-pin wedge lock, female

DT 12-PIN FEMALE CONNECTOR

271-90103	DT 12-pin connector, female
271-90104	DT 12-pin wedge lock, female, 10-pack
271-9099	DT contact pins 1,3-2,1 mm ² 10-pack
271-9098	DT contact pins 0,5-1,5 mm ² 10-pack





DT 2-PIN LONG MALE CONNECTOR

271-9181	DT 2-pin long connector, male, complete kit
5.271-9181	DT 2-pin long connector, male, complete kit for store
271-9081	DT 2-pin long connector, male
271-9083	DT 2-pin wedge lock, male, 10-pack



DTP 2-PIN MALE CONNECTOR

271-90186	DT 2-pin connector, male, DTP
271-90187	DT 2-pin wedge lock, male, DTP
271-90190	DT contact pin 2-3 mm ² DTP



DTP 2-PIN MALE CONNECTOR

271-9192	DT 2-pin connector, male, complete kit
271-9082	DT 2-pin connector, male, 10-pack
271-9102	DT contact pins 1.3-2.1 mm ² , 10-pack
271-9101	DT contact pins 0.5-1.5 mm ² , 10-pack
5.271-9192	DT 2-pin connector, male, complete kit for store
271-9083	DT 2-pin wedge lock, male, 10-pack



DT 3-PIN MALE CONNECTOR

271-9183	DT 3-pin connector, male, complete kit
271-9074	DT 3-pin wedge lock, male
271-9102	DT contact pins 1,3-2,1 mm ² 10-pack
271-9101	DT contact pins 0,5-1,5 mm ² 10-pack
271-9071	DT 3-pin connector, male, without flange
5.271-9183	DT 3-pin connector, male, complete for store



DT 4-PIN MALE CONNECTOR

271-9191	DT 4-pin connector, male, complete kit
271-9089	DT 4-pin connector, male
271-9101	DT contact pins 0,5-1,5 mm ² 10-pack
271-9102	DT contact pins 1,3-2,1 mm ² 10-pack
5.271-9191	DT 4-pin connector, male, complete kit for store
271-9084	DT 4-pin wedge lock male



DT 4-PIN MALE WEDGE LOCK

271-9189	DT 4-pin connector, male, complete kit for flange mounting
271-9084	DT 4-pin wedge lock male
271-9090	DT 4-pin connector, male, for flange mounting



DT 4-PIN LONG MALE CONNECTOR

271-9193	DT 4-pin long connector, male, complete kit
271-9188	DT 4-pin long connector, male
271-9084	DT 4-pin wedge lock, male



DT 6-PIN MALE CONNECTOR

271-9198	DT 6-pin connector, male, complete kit
271-9097	DT 6-pin connector, male, 10-pack
271-9087	DT 6-pin wedge lock, male, 10-pack
5.271-9198	DT 6-pin connector, male, complete kit for store



DT 8-PIN MALE CONNECTOR

271-9186	DT 8-pin connector, male, complete kit
271-9105	DT 8-pin connector, male
271-9106	DT 8-pin wedge lock, male



DT 12-PIN MALE CONNECTOR

271-90106	DT 12-pin wedge lock, male, 10-pack
271-90105	DT 12-pin connector, male
271-9102	DT contact pins 1,3-2,1 mm ² 10-pack
271-9101	DT contact pins 0,5-1,5 mm ² 10-pack



Article. 15801

WIRING HARNESS ADAPTER CABLE 20 CM

Used for connecting driving lights when the position lights need to be turned on. Adapter cable, 20 cm long. 4 DT to 2 DT.



Article. 15837

BRIODLIGHTS WIRING HARNESS, 1x 4-PIN DT

The package includes:

- Black cable, 1 meter
- Black ground cable, 2 meters
- Red power cable, 1 meter with 60 A fuse holder
- Blue control cable, 1 meter
- Red cable, 2 meters
- White position light cable, 3 meters
- Yellow position light cable, 3 meters
- 1 x 4-pin DT connector (unassembled)
- 1 x 80 A relay, 12 V
- Max power: 4 x 160 W



Article. 15838

BRIODLIGHTS WIRING HARNESS, 2x 4-PIN DT

The package includes:

- Black cable, 1 meter
- Black ground cable, 2 meters
- Red power cable, 1 meter with 60 A fuse holder
- Blue control cable, 1 meter
- Red cable, 2 meters
- White position light cable, 3 meters
- Yellow position light cable, 3 meters
- 2 x 4-pin DT connectors (unassembled)
- 1 x 80 A relay, 12 V
- Max power: 4 x 160 W

Article. 265-9031



BRIODLIGHTS DRIVING LIGHT WIRING HARNESS WITH RELAY 3x 2-PIN

The package includes:

Black cable, 1.5 meters
 Black ground cable, 2 meters
 Red power cable, 1 meter with 40 A fuse holder
 Blue control cable, 2 meters
 3 x 2-pin DT connectors (unassembled)
 1 x 40 A relay, 12 V
 Max power: 3 x 150 W

Article. 15828



BRIODLIGHTS WIRING HARNESS 4x 4-PIN DT

The package includes:

Black cable, 1 meter
 Black ground cable, 2 meters
 Red power cable, 1 meter with 60 A fuse holder
 Blue control cable, 1 meter
 Red cable, 2 meters
 White position light cable, 3 meters
 Yellow position light cable, 3 meters
 1 x 4-pin DT connector (unassembled)
 1 x 80 A relay, 12 V
 Max power: 4 x 160 W

Article. 265-9011



WIRING HARNESS WITH RELAY FOR LED BARS

Driving light wiring harness with relay for LED light bars with DT connector, 12 V.

Article. 265-9030



WIRING HARNESS WITH RELAY FOR DRIVING LIGHTS

Driving light wiring harness with relay for up to 3 driving lights. Connector sold separately if required. Fuse: 40 A. Cable length: 1.5 m. Max 3 x 150 W.

Article. 15889



XBB DONGLE & XBB POWERUNIT

XBB PowerUnit 6 is a smart solution for vehicle builders who want easy installation without accessing multiple signal wires. It's ideal for vehicles with several lights, allowing individual control of each function. Up to 4 units can be connected to one XBB Dongle, providing up to 24 outputs.

The unit works with XBB Dongle or PP-CAN-FD, reading vehicle CAN bus data (e.g. high beam, reverse, ignition) and transmitting signals via Bluetooth (BLE 5) to activate outputs based on your setup in the app. Note: Installation requires an XBB Dongle and a compatible vehicle profile.

Article. 15899



XBB DONGLE & XBB POWERUNIT

XBB offers one of the easiest and fastest ways to install vehicle lighting without affecting the vehicle's electrical system. This product is specifically designed for Bluetooth communication to minimize wiring. Using your smartphone, you can install your XBB PowerUnit in just a few minutes. 1 year warranty.

Article. 15891



XBB POWER UNIT

XBB PowerUnit functions as a relay for driving equipment such as LED bars, work lights, and other types of electrical equipment installed on vehicles. It features 2 fully programmable outputs, each protected against short circuits and overload. The XBB PowerUnit is fully programmable using the TSharkRex programming language. Bluetooth qualified.

Article. 15890



XBB MASTER UNIT

XBB Dongle acts as the master unit for all XBB-compatible products communicating via Bluetooth or CAN. It features a fully compatible CAN 2.0B controller for communication with vehicles through the OBDII port or other CAN-enabled devices, as well as via Bluetooth. XBB Dongle is Bluetooth qualified and supports connection of up to 4 XBB-compatible devices. It includes voltage monitoring and a three-axis digital accelerometer for wake-up functionality. Fully programmable using the TSharkRex programming language.

Article. 15896



XBB DONGLE MASTER UNIT

Control your lighting or connected equipment using a wireless push button. It communicates with your XBB Dongle via Bluetooth, eliminating the need to cut into wiring to install a traditional switch. The button can be programmed to activate or deactivate outputs 1 & 2 on your PowerUnits—giving you multiple functions in one button.

Article. 15900



CANM8 CANBUS UNIVERSAL

CAN bus adapter for vehicles without an analog high beam signal. 12–24 V. Max 1 amp.

Article. 15898



XBB OBD-II EXTENSION CABLE

Split wiring harness for XBB OBDII devices. 1:1 pin configuration with 2x female and 1x male connectors.



Article. 15897

XBB OBD-II Y-SPLITTER CABLE

Split wiring harness for OBDII – Y-splitter

- Length: 216 mm
- 1:1 pin configuration
- Connectors: 2 × female, 1 × male

BRIOD LIGHTS



@briodlights